



# **EDIFACT DELJIT D97A**

**Delivery Schedules to Suppliers**  
**Levelled procurement – LISA method**

**Version 4.0**

**Date 11.05.2018**

**Table of contents**

1. Document versions.....	3
2. Introduction.....	3
3. Message structure referenced at Faurecia .....	4
3.1. Segments table.....	4
3.2. Branching diagram.....	5
4. Segments description.....	7
5. Examples of Messages .....	33

## 1. Document versions

Version	Date	Comments
3.1	15.08.2008	Document released
3.4	05.06.2009	Trade Sales Modifications (Legacy QAD ERP)
3.5	30.12.2014	Draft - Levelled LISA, LISA-NG (FCS)
3.6	07.04.2015	Minor corrections
3.7	15.06.2015	Sample DELJIT added
4.0	11.05.2018	New version – New EDI guidelines layout

## 2. Introduction

This document provides a specific description of a subset of the EDIFACT DELJIT D97 A message, to be used in Electronic Data Interchange (EDI) between a Faurecia company and its trading partners. The description is specifically destined to cover the requirements for the Manifest, for Faurecia plants using the levelled procurement method, also called LISA method.

The Manifest message is a message from a Faurecia plant to its suppliers to give information regarding the pick up of material at the Supplier's location as well as the delivery of the material to the receiving site as specified and according to the conditions set out in the contract or order. The material flow is exactly steered via a special call-off-document, the Manifest, which is transmitted to suppliers.

It is the suppliers obligation to have all material ready for despatch at the pick-up window, as specified in the Manifest message.

The Manifest message is generated per pick-up time window and per truck. The Manifest messages are transmitted regularly, generally once per week. They can be grouped in one or several interchanges.

This guide is valid globally for all Faurecia plants running the Faurecia Core System.

### 3. Message structure referenced at Faurecia


#### 3.1. Segments table

In the table hereunder are included only the segments and segment groups used by Faurecia.


Pos.	Tag	Std Sts	Std Rep.	Fau Sts	Fau Rep.	Description
1	UNB	M	1	M	1	Interchange Header
2	UNH	M	1	M	1	Message Header
3	BGM	M	1	M	1	Beginning of message
4	DTM	M	10	M	1	Message date
5	FTX	C	5	O	5	Optional Free text
	SG1	C	10	M	1	RFF
6	RFF	M	1	M	1	Seller's account number
	SG2			M	1	NAD-SG3
7	NAD	M	1	M	1	Ship To details
	SG3	C	5	O	1	CTA
8	CTA	M	1	M	1	Contact details
	SG2			M	1	NAD
9	NAD	M	1	M	1	Supplier details
	SG4	M	9999	M	1	SEQ-LOC-SG7
10	SEQ	M	1	M	1	Structural Element
11	LOC	C	5	M	1	Place/ Location – Unloading Point
	SG7	C	9999	M	9999	LIN-PIA-IMD-FTX-SG8-SG9-SG11
12	LIN	M	1	M	1	Line item level: material number
13	PIA	C	10	O	1	Additional product ID
14	IMD	C	10	M	1	Line item description
15	FTX	C	5	O	5	Free text
16	PAC	C	5	O	1	Packaging details
	SG8	C	5	M	1	RFF
17	RFF	M	1	M	1	Reference to scheduling agreement / PO number
	SG9	C	5	M	1	LOC
18	LOC	M	1	O	1	Place/ Location – Final destination
	SG11	C	100	M	1	QTY-DTM-SG12
19	QTY	M	1	M	1	Quantity to be delivered
20	DTM	M	1	M	1	Requirement date/time
21	DTM	M	1	M	1	Requirement date/time
	SG12	C	5	M	1	RFF
22	RFF	M	1	M	1	MURN
23	RFF	M	1	O	1	Manifest sequence number
	SG11			O	1	QTY per package
24	QTY	M	1	M	1	Quantity per package
25	UNT	M	1	M	1	Message trailer
26	UNZ	M	1	M	1	Interchange trailer


### 3.2. Branching diagram

level

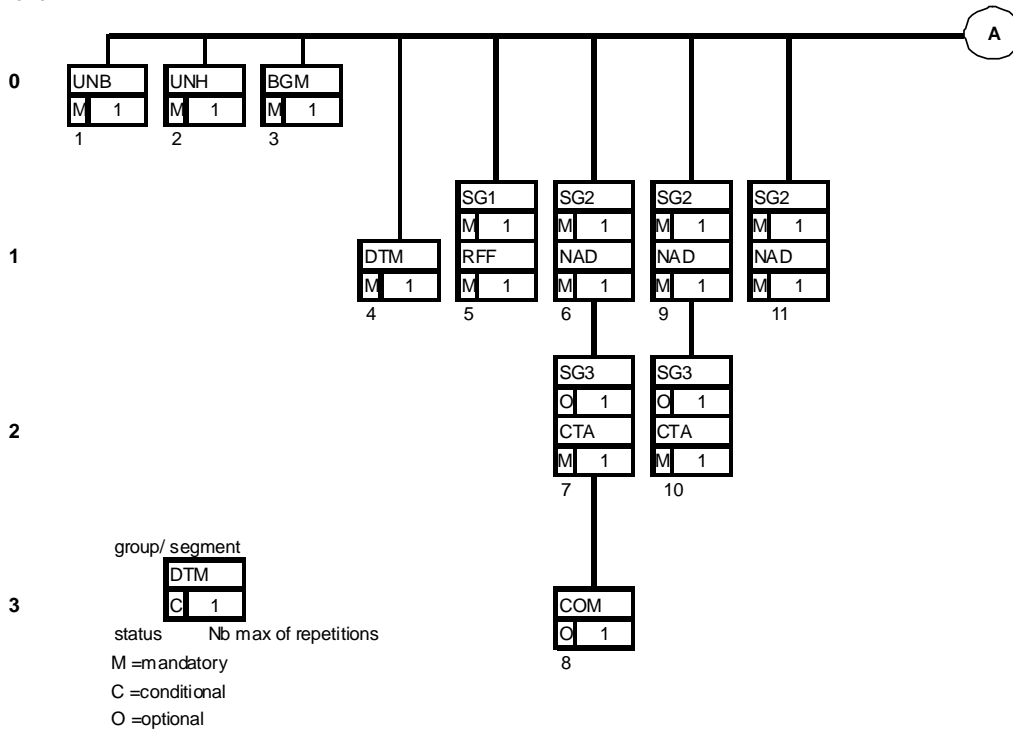

level

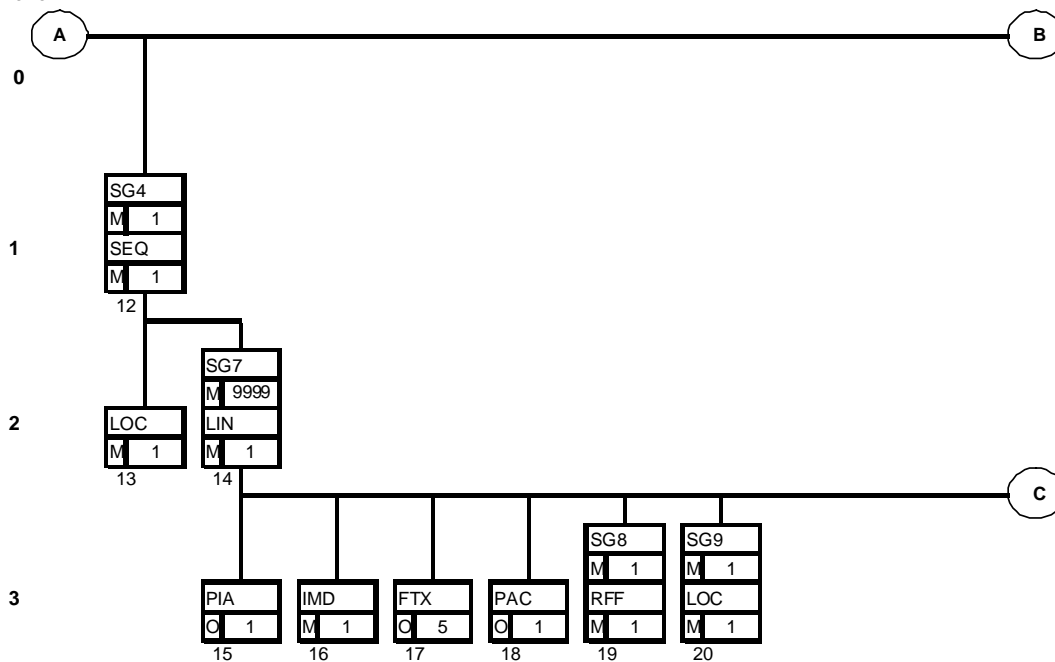

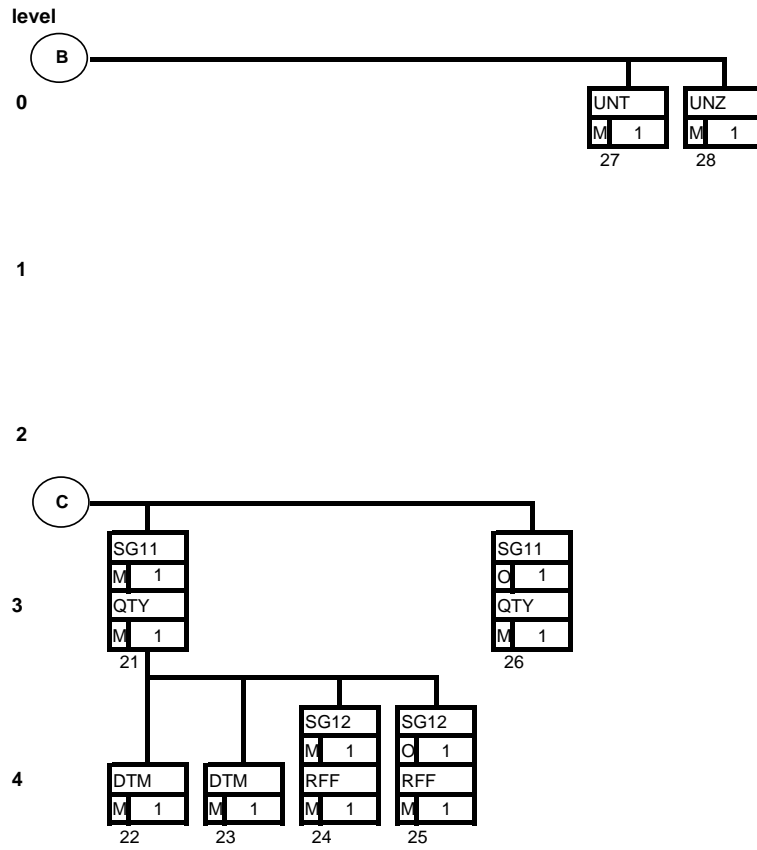

## 4. Segments description

Segment: **UNB** Pos.: 1 Level: 0  
Status: M Max. occ.: 1

Function: **Interchange header**

**Usage Notes:** Service segment providing the unique identification of an interchange. It allows the identification of the sender and the receiver of the interchange, gives the date and time of preparation as well as the interchange control reference and the application reference

EDIFACT STANDARD			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
UNB				UNB	
<b>S001</b>	<b>SYNTAX IDENTIFIER</b>	<b>M</b>	<b>M</b>		
0001	Syntax identifier	M a..4	M	+UNOA	<b>UNOA = UN/ECE level A</b> <b>3 = Version 3</b> Indication of the syntax version used for this message.
0002	Syntax version number	M n..1	M	:3	
<b>S002</b>	<b>INTERCHANGE SENDER</b>	<b>M</b>	<b>M</b>		
0004	Sender identification	M an..35	M	+FAURECIA-DUNS	Sender code
0007	Partner identification code qualifier	C an..4	C	:01	
0008	Address for reverse routing	C an..14	C		
<b>S003</b>	<b>INTERCHANGE RECIPIENT</b>	<b>M</b>	<b>M</b>		
0010	Recipient identification	M an..35	M	+SUPPLIER-DUNS	Receiver code
0007	Partner identification code qualifier	C an..4	C	:01	
0014	Address for reverse routing	C an..14	C		
<b>S004</b>	<b>DATE/TIME OF PREPARATION</b>	<b>M</b>	<b>M</b>		
0017	Date of preparation	M n6	M	+131106	Format: YYMMDD
0019	Time of preparation	M n4	M	:1815	Format: HHMM
0020	Interchange control reference	M an..14	M	+0027005'	
<b>S005</b>	<b>RECIPIENTS REFERENCE PASSWORD</b>	<b>C</b>	<b>C</b>		
0026	Application reference	C an..14	N		Not used
0029	Processing prio.-code	C a1	N		Not used
0031	Acknowledgement request	C n1	N		Not used
0032	Communications agreement	C an..35	N		Not used
0035	Test indicator	C n1	C		May be used upon specific agreement

### Example:

UNB+UNOA:3+FAURECIA-DUNS:01+SUPPLIER-DUNS:01+131106:1815+0027005'

**Segment:** **UNH** Pos.: 2 Level: 0  
Status: M Max. occ.: 1

**Function:** **Message header**

**Usage Notes:** Service segment starting and uniquely identifying a message.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
UNH				UNH	
<b>0062</b>	<b>Message reference number</b>	<b>M an..14</b>	<b>M</b>	+1	Message control number assigned by the sender of the message.
<b>S009</b>	<b>Message identifier</b>	<b>M</b>	<b>M</b>		
0065	Message type identifier	M an..6	M	+DELJIT	<b>DELJIT</b> = Delivery Just In Time Message
0052	Message type version number	M an..3	M	:D	<b>D</b> = Draft version/UN/EDIFACT Directory
0054	Message type release number	M an..3	M	:97A	<b>97A</b> =Release 1997 - A
0051	Controlling agency	M an..2	M	:UN	<b>UN</b> =UN/ECE/TRADE/WP.4
0057	Association assigned code	C an..6	O		Not required by Faurecia
0068	Common access reference	M an..35	N		Not used
<b>S010</b>	<b>Message identifier</b>	<b>M</b>	<b>N</b>		Not used

**Example:**

UNH+1+DELJIT:D:97A:UN'



**Segment:** **BGM** Pos.: 3 Level: 0  
Status: M Max. occ.: 1

**Function:** **Beginning of message – identification of a Manifest**

**Usage Notes:** Segment for a unique identification of the Manifest, by means of its number.  
Faurecia creates 1 message DELJIT D97A per Manifest Unique Reference Number (MURN).

EDIFACT STANDARD			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
BGM				BGM	
<b>C002</b>	<b>Document/message name</b>	<b>M</b>	<b>M</b>		<b>242 = Identifies Delivery Just In Time</b>
1001	Document/message name, coded	M an..3	M	+242	
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	N	:	Not used
1000	Document/message name	M an..35	M	:DELIVERY JUST IN TIME	<b>"DELIVERY JUST IN TIME"</b>
C106	<b>DOCUMENT/MESSAGE IDENTIFICATION</b>	C	M		
1004	Document/message number	C an..35	M	+0123456789	MURN=Manifest Unique Reference Number assigned by the buyer. <b>10 digits.</b>
1056	Version	C an..9	N		Not used
1060	Revision number	C an..6	N		Not used
1225	Message function, coded	C an..3	N		Not used
1000	Response type, coded	C an..3	N		Not used

**Example:**

BGM+242:::DELIVERY JUST IN TIME+0123456789'

Segment:

**DTM**

Pos.: 4      Level: 1  
Status: M      Max. occ.: 1

Function:

**Document date and time**

Usage notes:

Date and time when message was created

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
DTM				DTM	
<b>C507</b>	<b>Date/time/period</b>	<b>M</b>	<b>M</b>		
2005	Date/time/period qualifier	M an..3	M	+137	<b>137 = Document/message date/time</b>
2380	Date/time/period	C an..35	M	:200812170220	Date and time
2379	Date/time/period format qualifier	C an..3	M	:203'	<b>203 =CCYYMMDDHHMM</b>

Example:

DTM+137:201311061811:203'

Segment:

**FTX**

Pos.: 5  
Status: O

Level: 1  
Max. occ.: 5

Function: **Free text at line item level**

**Usage notes:**

Faurecia may utilize this information; it's recommended that you utilize it.  
Faurecia may or may not send important information in this segment as it pertains to the schedule itself.  
Faurecia recommends you include this segment in your EDI mappings.  
FTX+AAI+++THIS IS SAMPLE COMMENT TEXT'

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
FTX				FTX	
<b>4451</b>	<b>Text subject code qualifier</b>	<b>M an..3</b>	<b>M</b>	<b>+AAI</b>	<b>AAI = General information.</b>
<b>4453</b>	<b>Free text function code</b>	<b>C an..3</b>	N	+	Not used
<b>C107</b>	Text reference	<b>C</b>	N		Not used
4441	Free text description code	M an..17	N		Not used
1131	Code list identification code	C an..17	N		Not used
3055	Code list responsible agency code	C an..3	N		Not used
<b>C108</b>	<b>Text literal</b>	<b>C</b>	<b>M</b>	<b>+FREETEXT1'</b>	
4440	Free text	M an..512	M		Text line 1
4440	Free text	C an..512	C		Text line 2
4440	Free text	C an..512	C		Text line 3
4440	Free text	C an..512	C		Text line 4
4440	Free text	C an..512	C		Text line 5
3453	Language name code	C an..3	N		Not used
4447	Free text format code	C an..3	N		Not used

**Examples:**

FTX+LIN+++FREETEXT1'

**Group:** **SG1** Status: M Max. occ.: 1

**Segment:** **RFF** Pos.: 5 Level: 1  
Status: M Max. occ.: 1

**Function:** **Seller's Account Number**

**Usages notes:** The vendor account number assigned by Faurecia to the seller is critical information. It must be present in all documents sent to Faurecia, e.g. delivery notes, shipment documents, invoices, labels, ASNs.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		
1153	Reference qualifier	M an..3	M	+ADE	<b>ADE = Seller's account number</b>
1154	Reference number	C an..35	M	:1355000000'	Identifies the global account number assigned to the seller by Faurecia.
1156	Line number	C an..6	N		Not used
4000	Reference version number	C an..35	N		Not used

**Examples:**

RFF+ADE:1355000000'

RFF+ADE:165575'

**Group:** **SG2** Status: M Max. occ.: 1

**Segment:** **NAD** Pos.: 7 Level: 1  
Status: M Max. occ.: 1

**Function:** **Ship To**

**Usages notes:** SG2 NAD+ST with seller details must be present

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
NAD				NAD	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	+ST	<b>ST = SHIP TO</b>
<b>C082</b>	<b>Party identification details</b>	<b>C</b>	<b>M</b>		
3039	Party id. identification	M an..35	M	+198027620	Identification assigned to the ship to
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	C	:92	<b>01 = DUNs number</b> <b>92 =assigned by Buyer</b>
<b>C058</b>	<b>Name and address</b>	<b>C</b>	<b>O</b>		
3124	Name and address line	M an..35	C	+SHIP TO ADDRESS	Address
3124	Name and address line	C an..35	C	:	
3124	Name and address line	C an..35	C	:	
3124	Name and address line	C an..35	C	:	
3124	Name and address line	C an..35	C	:	
<b>C080</b>	<b>Party name</b>	<b>C</b>	<b>O</b>		
3036	Party name	M an..35	C	+SHIPTO NAME	Company name
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3045	Party name format, coded	C an..3	C		
<b>C059</b>	<b>Street</b>	<b>C</b>	<b>N</b>		Not used
3042	Street and number/p.o. box	M an..35	N	+	
3042	Street and number/p.o. box	M an..35	N		
3042	Street and number/p.o. box	M an..35	N		
3042	Street and number/p.o. box	C an..35	N		
<b>3164</b>	<b>City name</b>	<b>C an..35</b>	<b>O</b>	+TOWN	Town
3229	Country sub-entity identification	C an..9	N	+	Not used
3251	Postcode identification	C an..9	N	+	Not used
<b>3207</b>	<b>Country, coded</b>	<b>C an..3</b>	<b>O</b>	+FR	Refer to international standard ISO 3166

**Example:**

NAD+ST+198027620::92+SELLER ADDRESS1+SELLER NAME++TOWN+++FR'

Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

**Group:** **SG2** Status: M Max. occ.: 1

**Group:** **SG3** Status: C Max. occ.: 1

**Segment:** **CTA** Pos.: 8 Level: 2  
Status: O Max. occ.: 1

**Function:** **SHIP TO Contact details**

**Usage notes:**

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
CTA				CTA	
<b>3139</b>	<b>Contact function, coded</b>	<b>C an..3</b>	<b>M</b>	+IC	<b>IC = Information contact</b>
<b>C056</b>	<b>Department or employee details</b>	<b>C</b>	<b>M</b>		
3413	Department or employee identification	C an..17	N	+	Not used
3412	Department or employee	C an..35	M	:CONTACTNAME'	Contact name

**Example:**

CTA+IC+:CONTACTNAME'

**Group:** **SG4** Status: M Max. occ.: 1

**Segment:** **NAD** Pos.: 9 Level: 1  
Status: M Max. occ.: 1

**Function:** **Supplier Code name and address**

**Usage notes:** SG2-NAD with consignee details must be present.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
NAD				NAD	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	+SU	<b>SU = Supplier</b>
<b>C082</b>	<b>Party identification details</b>	<b>C</b>	<b>M</b>		
3039	Party id. identification	M an..35	M	+0000110552	Identification assigned to the consignee, see 3055
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	C	:92	<b>01 = DUNs number</b> <b>92 = Assigned by buyer</b>
<b>C058</b>	<b>Name and address</b>	<b>C</b>	<b>O</b>		
3124	Name and address line	M an..35	C	+SHIPTO ADDRESS1	Address 1
3124	Name and address line	C an..35	C	:	
3124	Name and address line	C an..35	C	:	
3124	Name and address line	C an..35	C	:	
3124	Name and address line	C an..35	C	:	
<b>C080</b>	<b>Party name</b>	<b>C</b>	<b>O</b>		
3036	Party name	M an..35	C	+SHIPTO NAME	Company name
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3045	Party name format, coded	C an..3	C		
<b>C059</b>	<b>Street</b>	<b>C</b>	<b>N</b>		
3042	Street and number/p.o. box	m an..35	N		Not used
3042	Street and number/p.o. box	C an..35	N		Not used
3042	Street and number/p.o. box	c an..35	N		Not used
3042	Street and number/p.o. box	c an..35	N	+	Not used
<b>3164</b>	<b>City name</b>	<b>C an..35</b>	<b>C</b>	+TOWN	Town
3229	Country sub-entity identification	C an..9	N	+	Not used
3251	Postcode identification	C an..9	N	+	Not used
<b>3207</b>	<b>Country, coded</b>	<b>C an..3</b>	<b>O</b>	+FR'	Refer to interenational Standard ISO 3166

**Example:**

NAD+SU+0000110552::92+SHIPTO ADDRESS1+SHIPTO NAME++TOWN+++FR'

**Group:** **SG4** Status: M Max. occ.: 1

**Segment:** **SEQ** Pos.: 10 Level: 1  
Status: M Max. occ.: 1

**Function:** Sequence details

**Usages notes:** 1 occurrence of SG4-SEQ per message DELJIT D97A from Faurecia

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
SEQ				SEQ	
<b>1245</b>	<b>Status indicator coded</b>	<b>M an..3</b>	<b>M</b>	<b>+6</b>	<b>6 = Agreement</b>
<b>C286</b>	<b>Sequence information</b>	<b>C</b>	<b>O</b>		
1050	Sequence number	M an..6	M	+000001'	Sequence number = 1
1159	Sequence number source, coded	C an..3	N		Not used
1131	Code list qualifier	C an..3	N		Not used
3055	Code list responsible agency, coded	C an..3	N		Not used

**Example:**

SEQ+6'



**Group:** **SG4** Status: M Max. occ.: 1

**Segment:** **LOC** Pos.: 11 Level: 2  
Status: M Max. occ.: 1

**Function:** **Unloading point**

**Usage notes:** 1 place of discharge per message DELJIT D97A from Faurecia.  
The unloading point/ place of discharge provided by Faurecia must show on the transport labels, both package and handling unit levels, in the specified area of the label.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
LOC				LOC	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	<b>+11</b>	<b>11 = Place of discharge</b>
<b>C517</b>	<b>Location identification</b>	<b>C</b>	<b>M</b>		
3225	Place/location identification	C an..25	M	+1081-R139'	Identification on <b>9 digits</b> assigned by Faurecia to the receiving dock at the plant
1131	Code list qualifier	C an..3	N		Not used
3055	Code list responsible gency,coded	C an..3	N		Not used
3224	Place/location	C an..70	N		Not used

**Examples:**

LOC+11+1081-R139'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 1

**Segment:** **LIN** Pos.: 12 Level: 2  
Status: M Max. occ.: 1

**Function:** **Line item**

**Usage notes:** 1 occurrence of SG7 per item within one Manifest.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
LIN				LIN	
<b>1082</b>	<b>Line item number</b>	<b>C n..6</b>	<b>C</b>	+1	
<b>1229</b>	<b>Action request/notification, coded</b>	<b>C an..3</b>	N	+	Not used
<b>C212</b>	<b>Item number identification</b>	<b>C</b>	<b>M</b>		
7140	Item number	C an..35	M	+96186112ZL	Material number assigned by Faurecia
7143	Item number type, coded	C an..3	N		Not used
1131	List qualifier	C an..3	N		Not used
3055	List responsible agency	C an..3	C	:IN'	<b>IN =Buyer's item number</b>
C212	SUB-LINE-Information	C	N		Not used
1222	Configuration level	C n..2	N		Not used
7083	Configuration, coded	C an..3	N		Not used

**Example:**

LIN+1+++96186112ZL:IN'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Segment:** **PIA** Pos.: 13 Level: 3  
Status: O Max. occ.: 1

**Function:** **Additional product identification**

**Usage notes:** Faurecia may use 2 C212 data elements. First occurrence with 7143=MP then 7140 represents the Sebango number. When the despatch is done to meet a Manifest, this short identification must show on the package labels, in the specified area. Second occurrence with 7143=SA then 7140 represents the Supplier's item number. When the despatch is done to meet a Manifest, this number must show on the package labels, in the specified area.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
PIA				PIA	
<b>4347</b>	<b>Product id. function qualifier</b>	<b>M an..3</b>	<b>M</b>	+1	<b>1 = Additional identification</b>
<b>C212</b>	<b>Item number</b>	<b>M</b>	<b>M</b>		
7140	Item number	C an..35	M an..4	+874Z	<b>Faurecia Sebango</b> =product short identification used at production line, <b>4 digits</b>
7143	Item number type, coded	C an..3	M	:MP'	<b>MP = Product identification number</b>
1131	List qualifier	C an..3	N		Not used
3055	List responsible agency, coded	C an..3	N		Not used
<b>C212</b>	<b>Item number</b>	<b>C</b>	<b>O</b>		
7140	Item number	C an..35	O	+18G6508000	Supplier item number
7143	Item number type, coded	C an..3	O	:SA'	<b>SA = Supplier article number</b>
1131	List qualifier	C an..3	N		Not used
3055	List responsible agency, coded	C an..3	N		Not used
C212	Item number	C	N		Not used
C212	Item number	C	N		Not used
C212	Item number	C	N		Not used

**Example:**

PIA+1+874Z:MP+18G6508000:SA'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Segment:** **IMD** Pos.: 14 Level: 3  
Status: M Max. occ.: 1

**Function:** **Item description**

**Usage notes:** The item description must show on the package labels in the specified area.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
IMD				IMD	
<b>7077</b>	<b>Item description type, coded</b>	<b>M an..3</b>	<b>M</b>	+XXX	<b>"XXX" = semi structured</b>
7081	Item characteristic, coded	C an..3	N	+	Not used
<b>C273</b>	<b>Item description</b>	<b>C</b>	<b>M</b>		
7009	Item description identification	C an..17	N	+	Not used
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	N	:	Not used
7008	Item description	C an..35	M	:MATDESCRIPTION'	Description of the material delivered
7008	Item description	C an..35	O	:DESCRIPTION'	Optional additional description of the material
3453	Language, coded	C an..3	N		Not used
7383	Surface/layer indicator, coded	C an..3	N		Not used

**Example:**

MD+XXX++:::MATDESCRIPTION:DESCRIPTION2'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Segment:** **FTX** Pos.: 15 Level: 3  
Status: O Max. occ.: 1

**Function:** **Free text at line item level**

**Usage notes:**

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
FTX				FTX	
<b>4451</b>	<b>Text subject code qualifier</b>	<b>M an..3</b>	<b>M</b>	+LIN	<b>LIN = Text related to line item.</b>
<b>4453</b>	<b>Free text function code</b>	<b>C an..3</b>	<b>N</b>	+	Not used
<b>C107</b>	Text reference	<b>C</b>	<b>N</b>		Not used
4441	Free text description code	M an..17	M	+	
1131	Code list identification code	C an..17	C		
3055	Code list responsible agency code	C an..3	C		
<b>C108</b>	<b>Text literal</b>	<b>C</b>	<b>M</b>		
4440	Free text	M an..512	M	+FREETEXT1'	Text line 1
4440	Free text	C an..512	C		Text line 2
4440	Free text	C an..512	C		Text line 3
4440	Free text	C an..512	C		Text line 4
4440	Free text	C an..512	C		Text line 5
3453	Language name code	C an..3	N		Not used
4447	Free text format code	C an..3	N		Not used

**Examples:**

FTX+LIN+++FREETEXT1'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Segment:** **PAC** Pos.: 16 Level: 3  
Status: O Max. occ.: 1

**Function:** **Packing description, optional**

**Usage notes:** The package type assigned by Faurecia must show on the delivery notes to Faurecia and be quoted in the ASN to Faurecia.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
PAC				PAC	
<b>7224</b>	<b>Number of packages</b>	<b>C n..8</b>	N	+	Not used
<b>C531</b>	<b>Packaging details</b>	<b>C</b>	N	+	Not used
<b>C202</b>	<b>Package type</b>	<b>C</b>	<b>M</b>		
7065	Of packages identification	C an..17	M	+FAU-1234-R'	Faurecia reference for the type of packaging used.
1131	List qualifier	C an..3	C	:	
3055	List responsible agency, coded	C an..3	C	:92'	<b>92 = assigned by buyer</b>
7064	Type of package	C an..35	N		Not used
C402	Package type identification	C	N		Not used
C532	Returnable package details	C	N		Not used

**Example:**

PAC+++FAU-1234-R::92'

<b>Group:</b>	<b>SG4</b>	Status: M	Max. occ.: 1
<b>Group:</b>	<b>SG7</b>	Status: M	Max. occ.: 9999
<b>Group:</b>	<b>SG8</b>	Status: M	Max. occ.: 1
<b>Segment:</b>	<b>RFF</b>	Pos.: 17 Status: M	Level: 3 Max. occ.: 1
<b>Function:</b>	<b>Reference purchase order number</b>		

**Usage notes:** Faurecia issues 1 purchase order number per material. It is critical information and must be quoted in delivery note, ASN and invoices to Faurecia.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		
1153	Reference qualifier	M an..3	M	+ON	<b>ON = Order number (purchase)</b>
1154	Reference number	C an..35	M	:5500222573'	Order number for the material. To retrieve from the DELFOR message from Faurecia: <b>10 numeric digits max.</b>
1156	Line number	C an..6	N		Not used
4000	Reference version number	C an..35	N		Not used

**Example:**

RFF+ON:5500222573'

<b>Group:</b>	<b>SG4</b>	Status: M	Max. occ.: 1
<b>Group:</b>	<b>SG7</b>	Status: M	Max. occ.: 9999
<b>Group:</b>	<b>SG9</b>	Status: M	Max. occ.: 1
<b>Segment:</b>	<b>LOC</b>	Pos.: 18 Status: M	Level: 3 Max. occ.: 1
<b>Function:</b>	<b>Final destination / Customer storage location</b>		

**Usage notes:** When the dispatch is done to meet a Manifest, the final destination assigned by Faurecia must show on the package label, in the specified area of the label.0130

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
LOC				LOC	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	+159	<b>159 = Final destination</b>
<b>C517</b>	<b>Location identification</b>	<b>C an..3</b>	<b>M</b>		
3225	Place / location identification	M an..25	M	+WM LIGHT'	Identification assigned by Faurecia to the final destination of the materials.
1131	Code list qualifier	C an..3	N		Not used
3055	Code list responsible agency, coded	C an..3	N		Not used
3224	Place / location	C an..70	N		Not used

**Example:**

LOC+159+WM LIGHT'



**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Group:** **SG11** Status: M Max. occ.: 1

**Segment:** **QTY** Pos.: 19 Level: 3  
Status: M Max. occ.: 1

**Function:** **Ordered Quantity**

**Usage notes:** 1 occurrence for SG11 per SG7 in 1 message DELJIT D97A for 1 item ther is only 1 requirement.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
QTY				QTY	
<b>C186</b>	<b>Quantity details</b>	<b>M</b>	<b>M</b>		
6063	Quantity qualifier	M an..3	M	+21	<b>21 = Ordered quantity</b>
6060	Quantity	M n..10	M	:100	Quantity, no decimals
6411	Measure unit qualifier	C an..3	C	:PCE'	For code see UN/ECE recommendation Nr.20

**Example:**

QTY+21+100:PCE'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Group:** **SG11** Status: M Max. occ.: 1

**Segment:** **DTM** Pos.: 20 Level: 4  
Status: M Max. occ.: 1

**Function:** **Pick up date and time**

**Usage notes:** DTM+136 is the date and time at the materials are scheduled to be despatched or picked up from the supplier.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	DTM			DTM	
<b>C507</b>	<b>Date / time / period</b>	<b>M</b>	<b>M</b>		
2005	Date /time / period qualifier	M an..3	M	+136	<b>136 = Pick-Up date and time</b>
2380	Date / time / period	C n..35	M	:201311130900	Date and time, see 2379
2379	Date / time / period format qualifier	C an..3	M	:203'	<b>203 = CCYYMMDDHHMM</b>

**Example:**

DTM+136:201311130900:203'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Group:** **SG11** Status: M Max. occ.: 1

**Segment:** **DTM** Pos.: 21 Level: 4  
Status: M Max. occ.: 1

**Function:** **Delivery date and time, first**

**Usage notes:** DTM+117 is the date and time at the earliest the materials are expected to be delivered at Faurecia.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
DTM				DTM	
<b>C507</b>	<b>Date / time / period</b>	<b>M</b>	<b>M</b>		
2005	Date /time / period qualifier	M an..3	M	+117	<b>117 = Delivery date and time</b>
2380	Date / time / period	C n..35	C	:201311131200	Date and time, see 2379
2379	Date / time / period format qualifier	C an..3	C	:203'	<b>203 = CCYYMMDDHHMM</b>

**Example:**

DTM+117:201311131200:203'

<b>Group:</b>	<b>SG4</b>	Status: M	Max. occ.: 1
<b>Group:</b>	<b>SG7</b>	Status: M	Max. occ.: 9999
<b>Group:</b>	<b>SG11</b>	Status: M	Max. occ.: 1
<b>Group:</b>	<b>SG12</b>	Status: M	Max. occ.: 1
<b>Segment:</b>	<b>RFF</b>	Pos.: 22 Status: M	Level: 4 Max. occ.: 1
<b>Function:</b>	<b>MURN – Manifest Unique Reference Number</b>		

**Usage notes:** **Important:** When a despatch is done to meet a Manifest, Faurecia books the receipt with the MURN as delivery reference. Therefore at supplier's end the MURN shall be retained as reference for this despatch and the ASN, when required, and the invoice to Faurecia shall quote as reference the MURN to allow reconciliation.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		
1153	Reference qualifier	M an..3	M	+MA	<b>MA =Manifest number</b>
1154	Reference number	M an..35	M	:0123456789'	MURN – Manifest unique reference number assigned by Faurecia <b>10 digits</b>
1156	Line number	C an..6	N		Not used
4000	Reference version number	C an..35	N		Not used

**Example:**  
RFF+MA:0123456789''

<b>Group:</b>	<b>SG4</b>	Status: M	Max. occ.: 1
<b>Group:</b>	<b>SG7</b>	Status: M	Max. occ.: 9999
<b>Group:</b>	<b>SG11</b>	Status: M	Max. occ.: 1
<b>Group:</b>	<b>SG12</b>	Status: O	Max. occ.: 1
<b>Segment:</b>	<b>RFF</b>	Pos.: 23 Status: M	Level: 4 Max. occ.: 1
<b>Function:</b>	<b>Manifest sequence number</b>		

**Usage notes:**

Faurecia generates 1 Manifest sequence number per MURN.  
It has this syntax YYYYMMDDNN-SU where YYYYMMDD = the day of delivery, NN= the number of manifest within this day starting with value 01, SU=suffix, index starting with value 00; 00 is normal initial manifest.  
When the despatch is done to meet a Manifest, this number must show on the labels, in the specified field of the label. Since this number is helpful to organise the loads to despatch, it is strongly advised to show this number on all documents used for the preparation of shipments to Faurecia.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		<b>AAO = Consignee shipment reference number</b>
1153	Reference qualifier	M an..3	M	+AAO	
1154	Reference number	M an..35	M	:2014033101-00'	Manifest sequence number to allow simple scheduling and visual monitoring of despatches.
1156	Line number	C an..6	N		Not used
4000	Reference version number	C an..35	N		Not used

**Example:**

RFF+AAO:2014033101-00'

**Group:** **SG4** Status: M Max. occ.: 1

**Group:** **SG7** Status: M Max. occ.: 9999

**Group:** **SG11** Status: O Max. occ.: 1

**Segment:** **QTY** Pos.: 24 Level: 3  
Status: M Max. occ.: 1

**Function:** **Packed quantity**

**Usage notes:** The Supplier is required to meet at all times the quantity per pack provided in 6060 data element; when provided this information is the same as the one stated in the supplier logistics agreement documents.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
QTY				QTY	
<b>C186</b>	<b>Quantity details</b>	<b>M</b>	<b>M</b>		
6063	Quantity qualifier	M an..3	M	+52	<b>52 = Quantity per pack</b>
6060	Quantity	M n..15	M	:20	Quantity, no decimals
6411	Measure unit qualifier	C an..3	M	:PCE'	For code see UN/ECE recommendation Nr.20

**Example:**

QTY+52+20:PCE'

**Segment:** **UNT** Pos.: 25 Level: 0  
Status: M Max. occ.: 1

**Function:** **Message trailer**

**Usage Notes:** Service segment ending a message, giving the total number of segments in the message and the control reference number of the message.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
UNT				UNT	
<b>0074</b>	<b>Number of segments in a message</b>	<b>M an..6</b>	<b>M</b>	+70	
<b>0062</b>	<b>Message ref. number</b>	<b>M an..14</b>	<b>M</b>	+1234'	Message control number assigned by the sender of the message.

**Example:**

UNT+70+1'

**Segment:** **UNZ** Pos.: 26 Level: 0  
Status: M Max. occ.: 1

**Function:** Interchange trailer

**Usage Notes:** Service segment ending an interchange and giving the number of messages containing in the interchange as well as the interchange control reference number.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
UNZ				UNZ	
<b>0036</b>	<b>Interchange control count</b>	<b>M n..6</b>	<b>M</b>	<b>+1</b>	
<b>0020</b>	<b>Interchange control reference</b>	<b>M an..14</b>	<b>M</b>	<b>+0027005'</b>	

**Example:**  
UNZ+1+0027005'



## 5. Examples of Messages

### Example 1:

UNB+UNOA:2+813026986:01+2488525500:12+180326:2340+6129  
 UNH+1+DELJIT:D:97A:UN  
 BGM+242:::DELIVERY JUST IN TIME+0251373081BGM+242:::DELIVERY JUST IN TIME+0251373081  
 DTM+137:201803262337:203  
 RFF+ADE:0000110552  
 NAD+ST+813026986::92+AV LIBRE COMERCIO NUM 101 RECI+Faurecia E.C. Silao (Gto)++Silao++36275+MX  
 NAD+SU+0000110552::92+AUBURN CT.+FLEXIBLE PRODUCTS COMPANY++AUBURN HILLS++48326+US  
 SEQ+6  
 LOC+11+1802-R547  
 LIN+1++1598124X:IN  
 PIA+1+124X:MP  
 IMD+XXX+:::DAMPER K2XXIMD+XXX+:::DAMPER K2XX  
 PAC+++FCM\_C12157:::92  
 RFF+ON:5800017523  
 LOC+159+VERDE-48A  
 QTY+21:6000:PCE  
 DTM+136:201804031500:203  
 DTM+117:201804091500:203  
 RFF+MA:0251373081  
 RFF+AAO:2018040901-00  
 QTY+52:2000:PCE  
 UNT+21+1  
 UNZ+1+6129

### Example 2:

UNOA:2+605662907:01+SupplierDUNS#:01+150428:2358+5	Interchange start
UNH+1+DELJIT:D:97A:UN	Message start
BGM+242:::DELIVERY JUST IN TIME+0123456789	Document ID/MURN #
DTM+137:201311061811:203	Document date/time
FTX+AAI+++THIS IS SAMPLE COMMENT TEXT	Free Text
RFF+ADE:0000165575	Vendor account number
NAD+ST+605662907::92+4415 E. Indian Trail+Louisville++Louisville++40213+US	Ship-To information
NAD+SU+SupplierDUNS#::92+50 STREET AVE+COMPANY NAME++MICHIGAN++90210+US	Vendor ship-from information
SEQ+6	Structural segment
LOC+11+1081-R139	Unloading point
LIN+1++96186112ZL:IN	Part Number
PIA+1+0307:MP+18G6508000:SA	Add'l indentifications ;Sebango Nber
IMD+XXX+:::MATDESCRIPTION:DESCRIPTION2	Material Description
PAC+++FAU-1234-R:::92	Material Packaging Item code
RFF+ON:5500123456	PO Number
LOC+159+WM LIGHT	Place/Loc Line Feed
QTY+21:40:PCE	Order quantity
DTM+136:201504231400:203	Pick-up date/time
DTM+117:201504240545:203	Delivery date/time
RFF+MA:0184989032	Manifest Number (MURN)
RFF+AAO:2015042401-00	Manifest Sequence Number
QTY+52:10:PCE	Quantity per Package
UNT+21+1	Message end
UNZ+1+5	Interchange end