



# **EDIFACT DESADV D96A**

**Despatch Advice  
from Suppliers to FAURECIA  
implementation guideline**

**Version 3.5**

**Date 12-03-2024**

Table of contents

1. Document versions.....	2
2. Introduction.....	2
3. Message structure referenced at Faurecia .....	3
3.1. Segment table .....	3
3.2. Branch diagram .....	4
3.3. Detailed information about Packaging .....	5
3.4. Segments description .....	13
4. Examples.....	48
4.1. Example of Dispatch Advice referring to a MURN - LISA process .....	48
4.2. Example using Simplified Handling Units.....	49
4.3. Example using homogeneous Handling Units.....	50
4.4. Example using Mixed (Heterogeneous) Handling Units .....	52
5. Appendix.....	53

## 1. Document versions

Version	Date	Comments
1.9	17.02.2014	Initial issue
2.0	15.09.2014	To take into account the ASNs done when the Despatch is made to meet a Manifest. To take into account the extended specification in Packaging area.
2.1	05.03.2015	Miskeying page 23 may lead to confusions. "CZ" was replaced with "SE".
2.2	09.01.2017	Miskeying in sample in page 29 may lead to confusions; Wrong Sample QTY+52+100:PCE' Good sample QTY+52:100:PCE'
2.3	27.07.2017	Correct mistake in Page 25, packaging item length: 17 digits instead of 10
3.0	12.01.2018	New version – new guideline layout + additional explanations and EDI samples + New appendix
3.1	15.03.2018	Correct mistake in LIN.7140; Faurecia material is 10 digits max.
3.2	30.11.2018	Correct mistake: Remove "No Decimals" comment in QTY+12 & QTY+52 segments. It allows managing unit of measures as MTR, KGM,... . 2 decimals max.
3.3	29.07.2019	LIN7140: Faurecia material length allowed is 35 instead of 10 digits max.
3.4	06.09.2022	EQD.8053: Besides TE value, CN & ZZZ values are allowed
3.5	12.03.2024	BGM.1004 length supported is 10 Digits max when LISA. Appendix: New point 3 – Explanation about LISA rule to be always followed

## 2. Introduction

This document provides the definition of an Advanced Shipping Notification (ASN) or Despatch Advice Message, based on the EDIFACT DESADV D96A, to be used in Electronic Data Interchange (EDI) between a Trading Partner and a Faurecia Company. The ASN/Despatch Advice message is a message from a Supplier to the relevant Faurecia application. It gives information concerning material despatched to a Faurecia location as instructed by a previously received Delivery Instruction and in line with the conditions set out in the contract or order.

### Functional description

The ASN/Despatch Advice message intends to:

- advise the recipient (Consignee) of the despatch of goods and to provide the details regarding the content of the consignment, including packages and handling units.
- allow the recipient (Consignee) to track material shipments and to prepare the physical receipt of the consignment.

The ASN/Despatch Advice message must always include the transportation information (e.g., weight, means of transport, etc.) related to the load advised.

Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

When the Despatch is made to meet the Delivery instructions given through a Manifest issued by Faurecia, then the MURN (Manifest Unique Reference Number, assigned by Faurecia) must be included in the ASN. **It is mandatory that the ASN/Despatch Advice is sent immediately after the departure of the materials.**

### 3. Message structure referenced at Faurecia


#### 3.1. Segment table

Pos.	Tag	Std Sts	Std Nb of rep.	Fau. Sts	Fau. Nb of rep.	Description
1	UNB	M	1	M	1	Interchange Header
2	UNH	M	1	M	1	Message Header
3	BGM	M	1	M	1	Beginning of message
4	DTM	C	10	M	1	Date of message
5	DTM			M	1	Expected date of delivery
6	DTM			C	1	Despatch date
7	MEA	C	5	M	1	Measurements – gross weight
8	MEA			O	1	Measurements
	SG1	C	10	O	1	RFF
9	RFF	M	1	M	1	Carrier Reference
	SG1			C	1	RFF
10	RFF			M	1	MURN – Manifest Unique Ref. Number assigned by Faurecia
	SG2	C	10	M	1	NAD-LOC
11	NAD	M	1	M	1	Consignee details
12	LOC	C	10	M	1	Place of discharge
	SG2			M	1	NAD-SG4
13	NAD			M	1	Consignor details
	SG4	C	10	O	1	CTA-COM
14	CTA	M	1	M	1	Contact details
15	COM	C	5	O	1	Communication details
	SG2			M	1	NAD-SG3
16	NAD			M	1	Seller details
	SG3	C	10	M	1	RFF
17	RFF	M	1	M	1	Vendor number assigned by Faurecia
	SG6	C	10	C	1	TDT
18	TDT	M	1	M	1	Details on Transport
	SG8	C	10	M	1	EQD
19	EQD	M	1	M	1	Equipment details
	SG10	C	9999	M	9999	CPS-SG11-SG15
20	CPS	M	1	M	1	Consignment Packing Sequence
	SG11	C	9999	M	9999	PAC-QTY-SG13
21	PAC	M	1	M	1	Package
22	QTY	C	10	C	1	Quantity
	SG13	C	1000	C	1000	PCI-RFF-GIR
23	PCI	M	1	M	1	Package identification
24	RFF	C	1	C	1	Reference
25	GIR	C	99	C	99	Related Identification Numbers
	SG14	C	99	C	99	GIN
26	GIN	M	1	M	1	Goods Identity Numbers
	SG15	C	9999	C	1	LIN-PIA-IMD-QTY-ALI-FTX-SG16
27	LIN	M	1	M	1	Line item level: material number and line item number
28	PIA	C	10	O	2	Additional product Id.
29	IMD	C	25	O	1	Line item description
30	QTY	C	10	M	1	Quantity
31	ALI	C	10	M	1	Additional Information
32	FTX	C	5	O	1	Free text
	SG16	C	10	M	1	RFF
33	RFF	M	1	M	1	Reference – Purchase Order Number
34	UNT	M	1	M	1	Message Trailer
35	UNZ	M	1	M	1	Interchange trailer


Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

**3.2. Branch diagram**

level

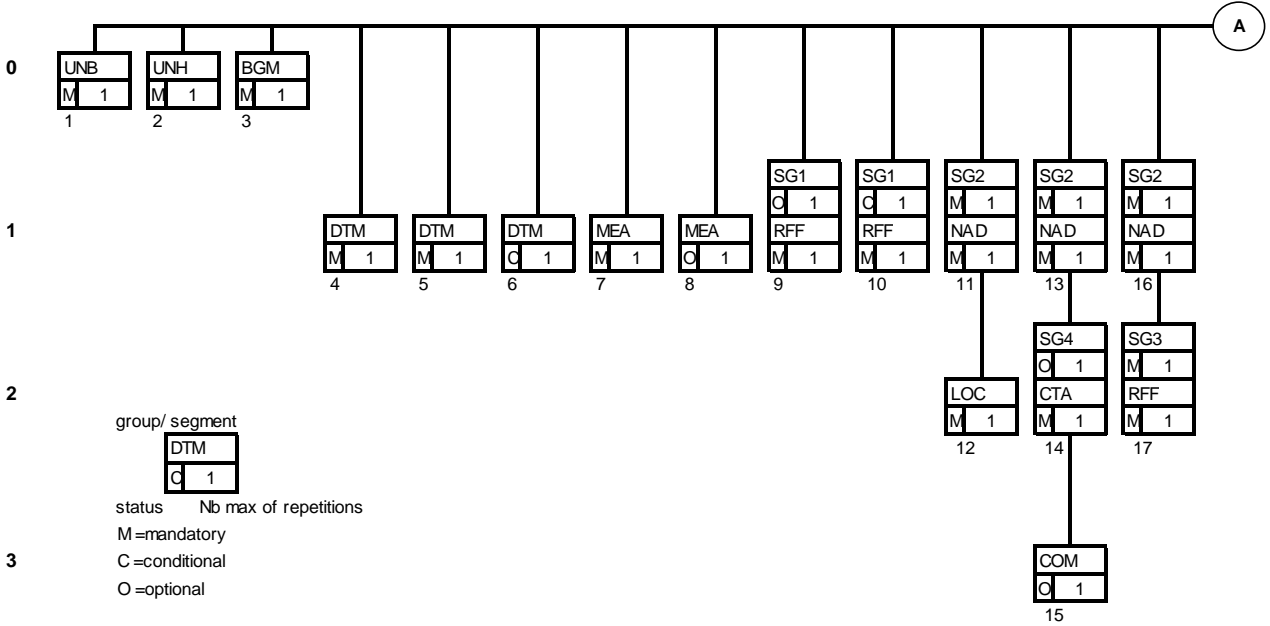

level

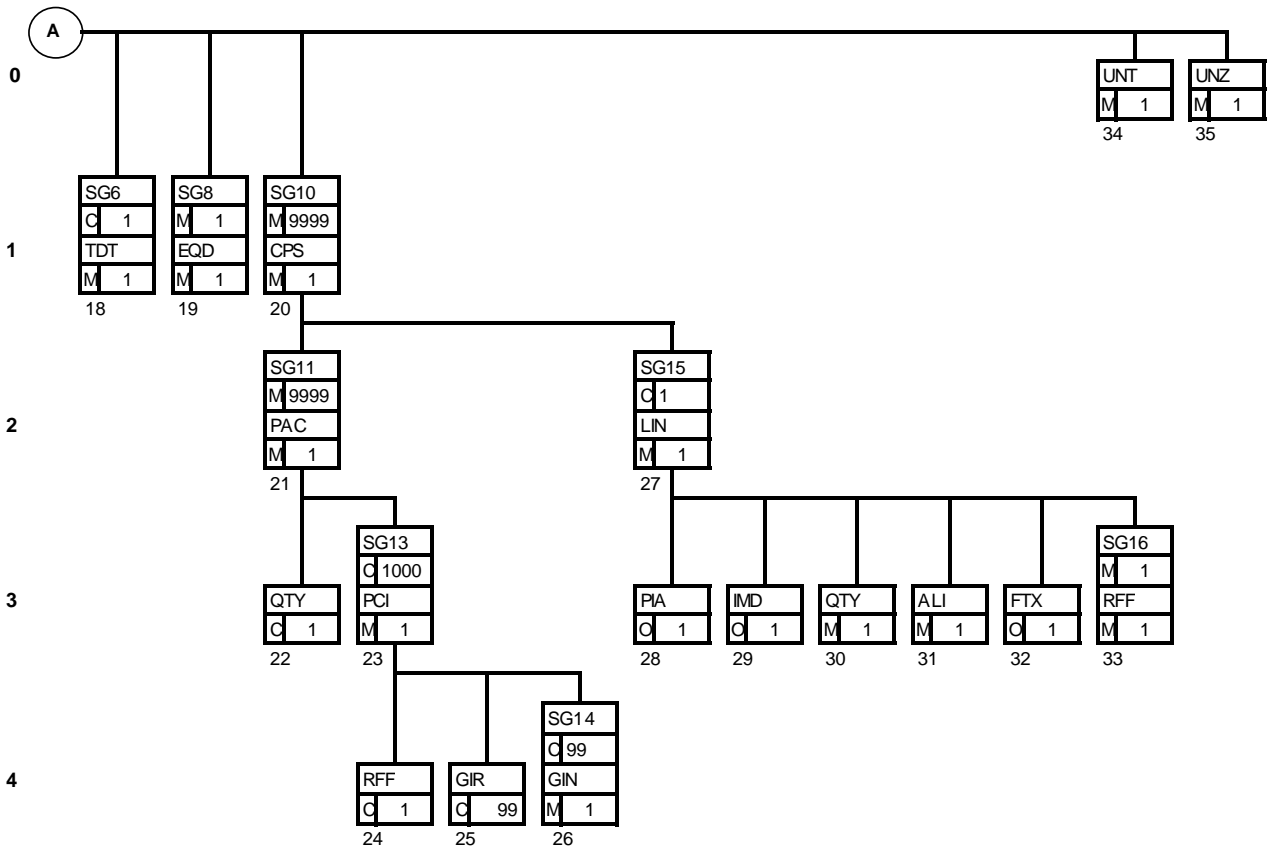

Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

### 3.3. Detailed information about Packaging

This section to bring clarifications in the area of Packaging, since this part of the despatch advice may be complex.

Definitions:

**Package** = A packaging in which the article itself is loaded.

**Handling Unit** = A device which can be handled physically (e.g. Pallet) and may carry one or several packages.

Handling units can be differentiated:

**Simplified Handling Unit**

Consists of one package which is handling unit at the same time.

**Non Simplified Handling Unit**

Consists of one or more packages which are not handling units at the same time.


**Homogeneous Handling Unit:** Consists of one unique article number.

**Mixed Handling Unit:** Consists of more than one article number (also called Heterogeneous HU).

**Important note:** Faurecia does not support multi-article packages,  
i.e. packages containing several different articles are not accepted.

**Structures and repetitions:**

Inner Packaging - CPS 7075 = 1 - Mandatory

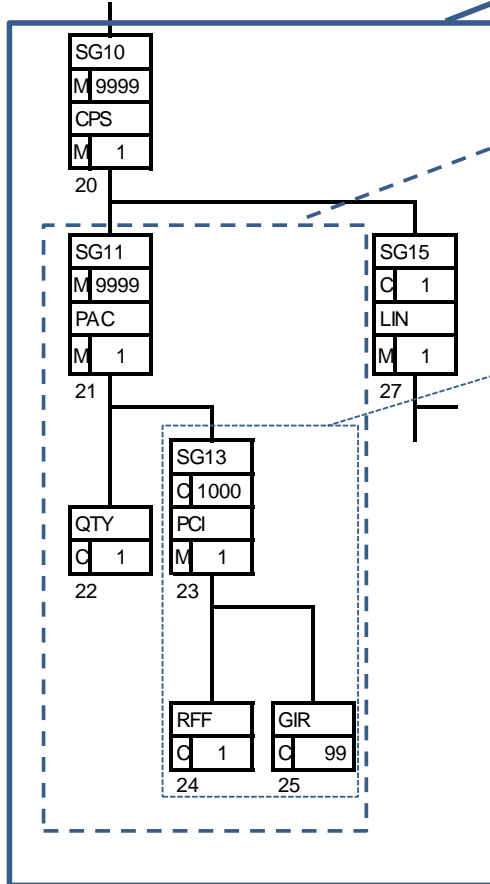


SG10 loop if several article numbers are delivered to the same place of discharge

SG11 loop if:  
 \* the same article number is packed in different types of package.  
 \* the same article number is packed in the same type of package but with different quantities.  
 \* auxiliary packaging is used in conjunction with the package type described for Inner Packaging.

SG13 loop if one article's package refers to different handling units

Outer packaging - CPS 7075 = 3 Optional

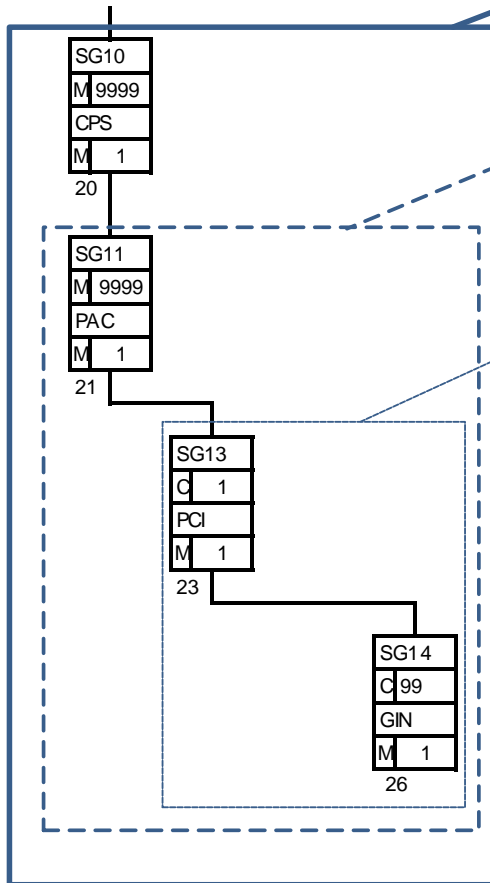

SG10 loop if several package types are used for Outer Packaging level (handling unit level)

1 occurrence of SG11 per package type, Outer Packaging, and per auxiliary packaging used in conjunction with the package type described for Outer Packaging.

1 occurrence of SG13 per SG11 when it is description of the package type for Outer Packaging


**Examples**

**Simplified Handling Units**

Item A is packed in Simplified Handling Unit, package type is SHU1, and standard quantity per package is 10 pieces. 3 packages are dispatched; package numbers are 11, 12, and 13. Package 13 has non-standard quantity, 8 pieces,

**Item A** is packed in three (3) small Packages:

- Package type: **SHU1**
  - o Package #**S11** = **10** pieces
  - o Package #**S12** = **10** pieces
  - o Package #**S13** = **8** pieces (non-standard pack)

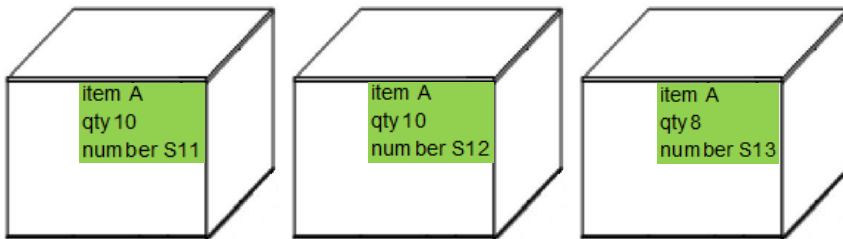

CPS+1++1'

PAC+2++SHU1 : : 92'

QTY+52 : 10 : PCE'

PCI+17'

RFF+AAT : 11'

GIR+3+11 : ML'

PCI+17'

RFF+AAT : 12'

GIR+3+12 : ML'

PAC+1++SHU1 : : 92'

QTY+52 : 8 : PCE'

PCI+17'

RFF+AAT : 13'

GIR+3+13 : ML'

LIN+++A : IN++0'

QTY+12 : 28 : PCE'




**Simplified Handling Units with Auxiliary Packaging**

Item A is packed in Simplified Handling Unit, package type is SHU1, and there are auxiliary packaging materials, with package type COV and package type COV2.  
Standard quantity per package is 10 pieces.  
3 packages are dispatched; package numbers are 11, 12, and 13.  
Package 13 has non-standard quantity, 8 pieces.

**Item A** is packed in three (3) small Packages, with Covers on each Package:

- Package type: **SHU1**
  - o Package #**S11** = 10 pieces
  - o Package #**S12** = 10 pieces
  - o Package #**S13** = 8 pieces (non-standard pack)
- Auxiliary Packaging materials, one (1) per Package:
  - o **COV**
  - o **COV2**

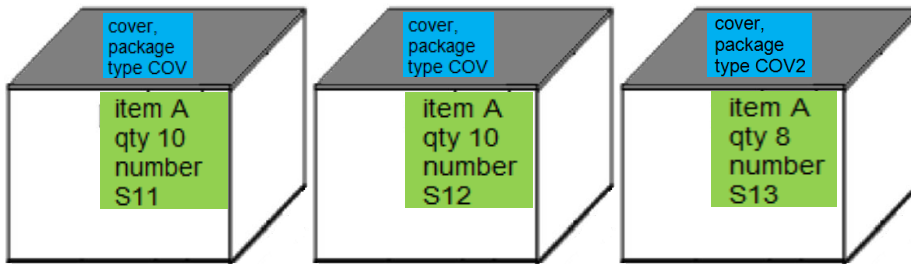


CPS+1++1'

PAC+2++**SHU1** : : 92'  
QTY+52 : **10** : PCE'  
PCI+17'  
RFF+AAT : **11** '  
GIR+3+**11** : ML'  
PCI+17'  
RFF+AAT : **12** '  
GIR+3+**12** : ML'

PAC+1++**SHU1** : : 92'  
QTY+52 : **8** : PCE'  
PCI+17'  
RFF+AAT : **13** '  
GIR+3+**13** : ML'

PAC+2+ : 37+**COV** : : 92'  
PAC+1+ : 37+**COV2** : : 92'

LIN+++**A** : IN++0'  
QTY+12 : 28 : PCE'

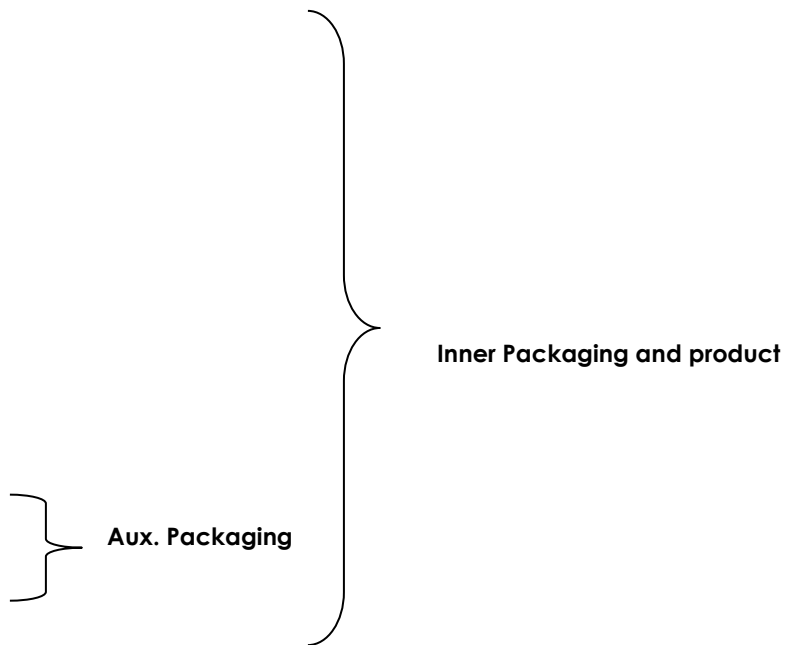


**NOTE:** **Aux. Packaging is optional** and not mandated, however if your PC&L analyst is requesting this information, they will communicate the packaging name/code to you in advance

**Homogeneous Handling Units, with Auxiliary Packaging**


Item A is packed in 6 small packages 21 to 26 with package type BOX1, then piled on pallets, 3 boxes per pallet, pallet has package type EUROPAL, 1 cover is used per pallet; cover has package type COV1. Quantity per package is 10 pieces. Package 26 has non-standard quantity, 8 pieces.

**Item A** is packed in six (6) small Packages which are loaded onto Pallets, with Covers on each Pallet:

- Package type: **BOX1**
  - o Package # **S21** = 10 pieces
  - o Package # **S23** = 10 pieces
  - o Package # **S25** = 10 pieces
  - o Package # **S22** = 10 pieces
  - o Package # **S24** = 10 pieces
  - o Package # **S26** = 8 pieces (non-standard pack)
- Packages are piled on two (2) Pallets type: **EUROPAL**
  - o Pallet # **M101** = Packages **S21, S22, S23**
  - o Pallet # **M102** = Packages **S24, S25, S26**
- Auxiliary Packaging materials, one (1) per Pallet:
  - o **COV1**

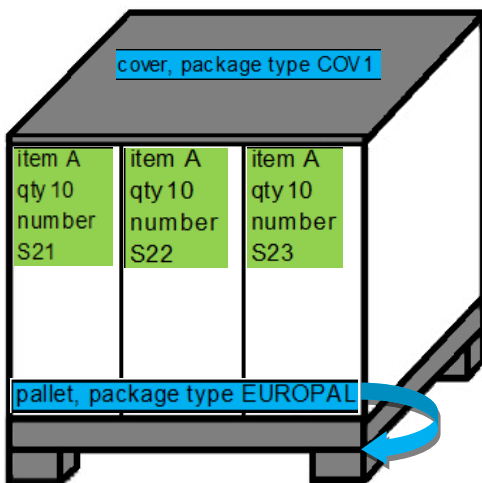

Homogeneous HU, Pallet Number M101

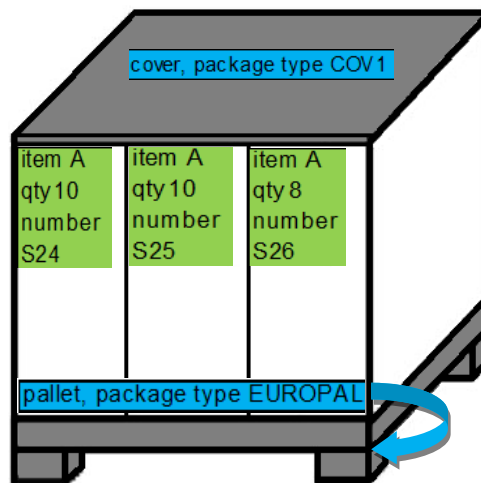

Homogeneous HU, Pallet Number M102

CPS+2++1'

PAC+5++BOX1 : : 92'  
 QTY+52 : 10 : PCE'  
 PCI+17'  
 RFF+AAT : 101'  
 GIR+3+21 : ML'  
 GIR+3+22 : ML'  
 GIR+3+23 : ML'  
 PCI+17'  
 RFF+AAT : 102'  
 GIR+3+24 : ML'  
 GIR+3+25 : ML'

PAC+1++BOX1 : : 92'  
 QTY+52 : 8 : PCE'  
 PCI+17'  
 RFF+AAT : 102'  
 GIR+3+26 : ML'

Inner Packaging and Product

LIN+++A:IN++0'  
QTY+12:58:PCE'  
CPS+3++3'

PAC+2+:41+EUROPAL::92'  
PCI+17'  
GIN+ML+101+102'


PAC+2+:37+COV1::92'



**NOTE:** **Outer Packaging (CPS+x++3) is optional** however if your PC&L analyst is requesting this information, they will communicate the packaging name/code to you in advance.

**Mixed Handling Units with Auxiliary Packaging**

Item A and B are packed respectively in 2 small packages 31 to 32 and in 1 package 33, all having package type BOX1, then piled on 1 pallet, 3 boxes per pallet, pallet has package type EUROPAL, 1 cover is used per pallet, cover has package type COV1. Quantity per package is 10 pieces for A and 15 pieces for B.

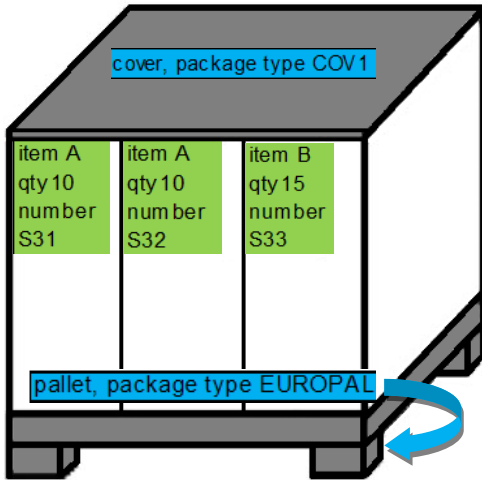

CPS+4++1'	}	<b>Inner Packaging, Product 1</b>
PAC+2++BOX1 : : 92'		
QTY+52 : 10 : PCE'		
PCI+17'		
RFF+AAT : 109'		
GIR+3+31 : ML'		
GIR+3+32 : ML'	}	<b>Inner Packaging, Product 2</b>
LIN+++A : IN++0'		
QTY+12 : 20 : PCE'		
CPS+5++1'		
PAC+1++BOX1 : : 92'		
QTY+52 : 15 : PCE'		
PCI+17'	}	<b>Outer Packaging</b>
RFF+AAT : 109'		
GIR+3+33 : ML'		
LIN+++B : IN++0'		
QTY+12 : 15 : PCE'		
CPS+6++3'		
PAC+1+ : 41+EUROPAL : : 92'		
PCI+17'		
GIN+ML+109'	}	
PAC+1+ : 37+COV1 : : 92'		

**NOTE:** **Outer Packaging (CPS+x++3) is optional** however if your PC&L analyst is requesting this information, they will communicate the packaging name/code to you in advance.

### 3.4. Segments description

**Segment:** **UNB** Pos.: 1 Level: 0  
Status: M Max. occ.: 1

**Function:** INTERCHANGE HEADER

**Usage Notes:** Service segment providing the unique identification of an interchange. It allows the identification of the sender and the receiver of the interchange, gives the date and time of preparation as well as the interchange control reference and the application reference

EDIFACT STANDARD			FAURECIA Implementation		
Name	St Format	St	Sample	Usage / Remarks	
UNB			UNB		
<b>S001 SYNTAX IDENTIFIER</b>	<b>M</b>	<b>M</b>			
0001 Syntax identifier	M a..4	M	+UNOA	<b>UNOA = UN/ECE level A</b>	
0002 Syntax version number	M n..1	M	:3	<b>3 = Version 3</b> Indication of the syntax version used for this message.	
<b>S002 INTERCHANGE SENDER</b>	<b>M</b>	<b>M</b>			
0004 Sender identification	M an..35	M	+O093100000875450157VIGAS	Address of the party originating the message.	
0007 Partner identification code qualifier	C an..4	C	:01	Upon agreement	
0008 Address for reverse routing	C an..14	C	:605662907	Upon agreement	
<b>S003 INTERCHANGE RECIPIENT</b>	<b>M</b>	<b>M</b>			
0010 Recipient identification	M an..35	M	+O093100000875450157SJMAS4	Communication code/mailbox number of the party receiving the message.	
0007 Partner identification code qualifier	C an..4	C	:01	Qualifier to be determined by the trading partner	
0014 Routing address	C an..14	C	:101649077	Routing Subaddress to be determined by the trading partner	
<b>S004 DATE/TIME OF PREPARATION</b>	<b>M</b>	<b>M</b>			
0017 Date of preparation	M n6	M	+131106	YYMMDD	
0019 Time of preparation	M n4	M	:1815	HHMM	
<b>0020 Interchange control reference</b>	<b>Man..14</b>	<b>M</b>	<b>+00027005'</b>	Number generated by the supplier EDI platform	
<b>S005 RECIPIENTS REFERENCE PASSWORD</b>	<b>C</b>	<b>N</b>		Not Used	
0026 Application reference	C an..14	N		Not Used	
0029 Processing prio. code	C a1	N		Not Used	
0031 Acknowledgement request	C n1	N		Not Used	
0032 Communications agreement id	C an..35	N		Not Used	
0035 Test indicator	C n1	C		May be used upon specific agreement	

**Examples:**

UNB+UNOA:3+O093100000875450157VIGAS+O093100000875450157SJMAS4+131106:1815+0027005'

Segment: **UNH** Pos.: 2 Level: 0  
Status: M Max. occ.: 1

Function: **MESSAGE HEADER**

**Usage Notes:** Service segment starting and uniquely identifying a message.  
The message type code for a despatch advice message is DESADV

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	UNH			UNH	
<b>0062</b>	<b>Message reference number</b>	M an..14	M	+1	Message control number assigned by the sender of the message.
<b>S009</b>	<b>MESSAGE IDENTIFIER</b>	<b>M</b>	<b>M</b>		
0065	Message type identifier	M an..6	M	+DESADV	<b>DESADV</b> = Delivery schedule
0052	Message type version number	M an..3	M	:D	<b>D</b> = Draft version/UN/EDIFACT Directory
0054	Message type release number	M an..3	M	:96A	<b>96A</b> =Release 1996 – A
0051	Controlling agency	M an..2	M	:UN	<b>UN</b> =UN/ECE/TRADE/WP.4
0057	Association assigned code	C an..6	O		Not required by Faurecia

**Example:**

UNH+1+DESADV:D:96A:UN'

UNH+1+DESADV:D:96A:UN:A01051'

Segment: **BGM** Pos.: 3 Level: 0  
Status: M Max. occ.: 1

Function: Identification of a delivery

Usage Notes: This segment is for a unique identification of the Despatch Advice, by means of its number.

**IMPORTANT:** When the Despatch is made to meet the shipping instruction given by Faurecia through a manifest (LISA mode) the maximum length of Delivery Note (BGM.1004) should be 10 DIGITS.

EDIFACT STANDARD			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
BGM				BGM	
<b>C002</b>	<b>Document/message name</b>	<b>M</b>	<b>M</b>		
1001	Document/message name, coded	M an..3	M	+351	<b>351 = Delivery Note</b>
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	N	:	Not used
1000	Document/message name	C an..35	N	:	Not used
<b>C106</b>	<b>Document/message identification</b>	<b>M</b>	<b>M</b>		
1004	Document/message number	M an..35	M	+0012345678'	Delivery note number <b>NOTE:</b> 10 DIGITS MAX allowed when LISA
1056	version	C an..9	N		Not used
1060	Revision number	C an..6	N		Not used
1225	Message function, coded	C an..3	N		Not used
4343	Response type, coded	C an..3	N		Not used

**Example:**

BGM+351+0012345678'

**Segment:** **DTM** Pos.: 4 Level: 1  
Status: M Max. occ.: 1

**Function:** Document Date/Time

**Usage Notes:** Faurecia requires that the Document date and time are present in the Despatch advice. Messages not containing these informations will be rejected.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
DTM				DTM	
<b>C507</b>	<b>Date/time/period</b>	<b>M</b>	<b>M</b>		
2005	Date/time/period qualifier	M an..3	M	+137	<b>137 = Document/message date/time</b>
2380	Date/time/period	C an..35	M	:200812170220	Message Date/Time
2379	Date/time/period format qualifier	C an..3	M	:203'	<b>203 = CCYYMMDDHHMM</b>

**Example:**

DTM+137:200812170220:203'



**Segment:** **DTM** Pos.: 5 Level: 1  
Status: M Max. occ.: 1

**Function:** **Expected Delivery Date and time**

**Usage Notes:** Faurecia requires that the Expected Delivery Date and time;  
i.e. the date and time the materials are available at Faurecia, are present in the Despatch Advice.  
The Expected Delivery date and time must be after the Document date and time.  
This rule should be met at all times: DTM+137 <= DTM+11 <= DTM+132

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	DTM			DTM	
<b>C507</b>	<b>Date/time/period</b>	<b>M</b>	<b>M</b>		
2005	Date/time/period qualifier	M an..3	M	+132	<b>132 = Delivery Date &amp; time Arrival date/time, estimated</b>
2380	Date/time/period	C an..35	M	:200812180800	Date & time
2379	Date/time/period format qualifier	C an..3	M	:203'	203 = CCYYMMDDHHMM

**Example:**

DTM+132:200812180800:203'

**Segment:** **DTM** Pos.: 6 Level: 1  
Status: C Max. occ.: 1

**Function:** **Despatch Delivery Date and time, Conditional**

**Usage Notes:** When the despatch was made to meet the shipping instruction given by Faurecia through a Manifest, the Despatch Date and Time are required. The Despatch date and time cannot be later than to the Expected Delivery Date and time.  
This rule should be met at all times: DTM+137 <= DTM+11 <= DTM+132

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	DTM			DTM	
<b>C507</b>	<b>Date/time/period</b>	<b>M</b>	<b>M</b>		
2005	Date/time/period qualifier	M an..3	M	+11	<b>11=Despatch Date and time</b>
2380	Date/time/period	C an..35	M	:200812170230	Date & time
2379	Date/time/period format qualifier	C an..3	M	:203	203 = CCYYMMDDHHMM

**Example:**

DTM+11:200812170230:203'

Segment: **MEA** Pos.: 7 Level: 1  
Status: M Max. occ.: 1

Function: **Gross Weight (Measurements)**

Usage Notes: Faurecia requires that the total gross weight of the shipment is present in the Despatch Advice.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
MEA				MEA	
<b>6311</b>	<b>Measurement application qualifier</b>	M an..3	M	+AAX	<b>AAX=Consignment measurement</b>
<b>C502</b>	<b>Measurements details</b>	<b>C</b>	<b>M</b>		
6313	Measurement dimension, coded	C an..3	M	+AAD	<b>AAD=Total gross weight</b>
6321	Measurement significance, coded	C an..3	N		Not used
6155	Measurement attribute, coded	C an..3	N		Not used
6154	Measurement attribute	C an..70	N		Not used
<b>C174</b>	<b>Value / Range</b>	<b>C</b>	<b>M</b>		
6411	Measure unit qualifier	M an..3	M	+KGM	For code see UN/ECE Recommendation Nr 20
6314	Measurement value	C n..18	M	: 550'	Total gross weight, no decimals, 8 digits max.
6162	Range minimum	C n..18	N		Not used
6152	Significant digits	C n..2	N		Not used
6432	Measurement attribute	C an..70	N		Not used
7383	Surface/layer indicator, coded	C an..3	N		Not used

**Example:**

MEA+AAX+AAD+KGM:550'

Segment: **MEA** Pos.: 8 Level: 1  
Status: O Max. occ.: 2

Function: **Net weight**

Usage Notes: The total net weight of the shipment may be included in the Despatch Advice. For information only.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
MEA				MEA	
<b>6311</b>	<b>Measurement application qualifier</b>	M an..3	M	+AAX	<b>AAX=Consignment measurement</b>
<b>C502</b>	<b>Measurements details</b>	<b>C</b>	<b>M</b>		
6313	Measurement dimension, coded	C an..3	M	+AAC	<b>AAC=Total net weight</b>
6321	Measurement significance, coded	C an..3	N		Not used
6155	Measurement attribute, coded	C an..3	N		Not used
6154	Measurement attribute	C an..70	N		Not used
<b>C174</b>	<b>Value / Range</b>	<b>C</b>	<b>M</b>		
6411	Measure unit qualifier	M an..3	M	+KGM	For code see UN/ECE Recommendation Nr 20
6314	Measurement value	C n..18	M	:300'	Total net weight, no decimals, 8 digits max.
6162	Range minimum	C n..18	N		Not used
6152	Significant digits	C n..2	N		Not used
6432	Measurement attribute	C an..70	N		Not used
7383	Surface/layer indicator, coded	C an..3	N		Not used

**Example:**

MEA+AAX+AAC+KGM:300'

**Group:** **SG1** Status: O Max. occ.: 1

**Segment:** **RFF** Pos.: 9 Level: 1  
Status: M Max. occ.: 1

**Function:** **Carrier Reference, optional**

**Usage Notes:** For information only.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		<b>CRN=Conveyance reference number</b>
1153	Reference qualifier	M an..3	M	+CRN	
1154	Reference number	C an..35	M	:ABC123'	

**Example:**

RFF+CRN:ABC123'

**Group:** **SG1** Status: C Max. occ.: 1

**Segment:** **RFF** Pos.: 10 Level: 1  
Status: M Max. occ.: 1

**Function:** **MURN – Manifest Unique Reference Number**

**Usage Notes:** When the Despatch was made to meet the shipping instruction given by Faurecia through a manifest, it is mandatory to provide the Manifest Unique Reference Number (MURN) initially issued by Faurecia. Recommended practice is to include SG1-RFF+MA segment in the Despatch Advice.  
**Important: It is mandatory when LISA**

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		
1153	Reference qualifier	M an..3	M	+MA	<b>MA= Manifest number</b>
1154	Reference number	C an..35	M	:0184486125'	

**Example:**

RFF+MA:0184486125'

Group: **SG2** Status: M Max. occ.: 1

Segment: **NAD** Pos.: 7 Level: 1  
Status: M Max. occ.: 1

Function: **Consignee Name and Address**

**Usage Notes:** Important: **SG2-NAD with Consignee details must be present.** It is **critical information**; messages not containing this information will be rejected. The value taken by data element C082 3039 must be retrieved from the delivery schedule, message DELFOR D96A transmitted by Faurecia.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
NAD				NAD	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	+CN	<b>CN = Consignee</b>
<b>C082</b>	<b>Party identification details</b>	<b>C</b>	<b>C</b>		
3039	Party id. identification	M an..35	M	+000244398203800046	Identification assigned to the Consignee, see 3055
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	C	:5	<b>5 = ISO identification</b> <b>10 = ODETTE identification</b> <b>16 = DUNs number</b> <b>92 = assigned by Buyer</b>
<b>C058</b>	<b>Name and address</b>	<b>C</b>	<b>O</b>		
3124	Name and address line	M an..35	M	+SHIPTO ADDRESS1	Address
3124	Name and address line	C an..35	C	:	Address
3124	Name and address line	C an..35	C	:	Address
3124	Name and address line	C an..35	C	:	Address
<b>C080</b>	<b>Party name</b>	<b>C</b>	<b>O</b>		
3036	Party name	M an..35	M	+SHIPTO NAME	Company name
3036	Party name	C an..35	C	:	
3036	Party name	C an..35	C	:	
3036	Party name	C an..35	C	:	
3036	Party name	C an..35	C	:	
3045	Party name format, code	C an..3	C	:	
C059	Street	<b>C</b>	<b>N</b>		Not used
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
<b>3164</b>	<b>City name</b>	<b>C an..35</b>	<b>O</b>	+TOWN	town
3229	Country sub-entity identification	C an..9	N	+	Not used
3251	Postcode identification	C an..9	N	+	Not used
<b>3207</b>	<b>Country, coded</b>	<b>C an..3</b>	<b>O</b>	+FR'	Refer to International Standard ISO 3166

**Example:**

NAD+CN+000244398203800046::5'

Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

**Group:** **SG2** Status: M Max. occ.: 1

**Segment:** **LOC** Pos.: 12 Level: 2  
Status: M Max. occ.: 1

**Function:** **Place of Discharge**

**Usage notes:** Faurecia requires that the place of discharge is present in the Despatch Advice. The value taken by the data element C517 3225 must be retrieved from the delivery schedule, message DELFOR D96A transmitted by Faurecia.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	LOC			LOC	
<b>3227</b>	<b>Place/location qualifier</b>	<b>M an..3</b>	<b>M</b>	+11	<b>11 = Place/port of discharge</b>
<b>C517</b>	<b>Location identification</b>	<b>C</b>	<b>M</b>		
3225	Place/location identification	M an..25	M	+1081-R139'	Identification on 9 digits assigned by Faurecia to the receiving dock at the plant.
1131	Code list qualifier	C an..3	N		Not used
3055	Code list responsible agency,coded	C an..3	N		Not used
3224	Place/location	C an..70	N		Not used

**Example:**

LOC+11+1081-R139'



Group: **SG2** Status: M Max. occ.: 1

Segment: **NAD** Pos.: 7 Level: 1  
Status: M Max. occ.: 1

Function: **Consignor Name and Address**

**Usage Notes:** Important: SG2-NAD with **Consignor details must be present.** It is critical information; messages not containing this information will be rejected. The value taken by the data element C082 3039 must be retrieved from the delivery schedule, message DELFOR D96A transmitted by Faurecia

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
NAD				NAD	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	+CZ	<b>CZ = Consignor</b>
<b>C082</b>	<b>Party identification details</b>	<b>C</b>	<b>M</b>		
3039	Party id. identification	M an..35	M	+100453	Identification assigned to the Consignee, see 3055
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	C	:92	<b>5 = ISO identification</b> <b>10 = ODETTE identification</b> <b>16 = DUNs number</b> <b>92 = assigned by Buyer</b>
<b>C058</b>	<b>Name and address</b>	<b>C</b>	<b>O</b>		
3124	Name and address line	M an..35	M	+SHIPTO ADDRESS1	Address
3124	Name and address line	C an..35	C	:	Address
3124	Name and address line	C an..35	C	:	Address
3124	Name and address line	C an..35	C	:	Address
<b>C080</b>	<b>Party name</b>	<b>C</b>	<b>O</b>		
3036	Party name	M an..35	M	+SHIPTO NAME	Company name
3036	Party name	C an..35	C	:	
3036	Party name	C an..35	C	:	
3036	Party name	C an..35	C	:	
3036	Party name	C an..35	C	:	
3045	Party name format, code	C an..3	C	:	
C059	Street	<b>C</b>	<b>N</b>		Not used
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
<b>3164</b>	<b>City name</b>	<b>C an..35</b>	<b>O</b>	+TOWN	town
3229	Country sub-entity identification	C an..9	N	+	Not used
3251	Postcode identification	C an..9	N	+	Not used
<b>3207</b>	<b>Country, coded</b>	<b>C an..3</b>	<b>O</b>	+FR'	Refer to International Standard ISO 3166

**Example:**

NAD+CZ+100453::92'

Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

**Group:** **SG2** Status: M Max. occ.: 1

**Group:** **SG4** Status: O Max. occ.: 1

**Segment:** **CTA** Pos.: 14 Level: 2  
Status: M Max. occ.: 1

**Function:** **Consignor contact details**

**Usage Notes** Faurecia recommends that a Contact name is provided in the ASN, same information as the one printed on the paper delivery note.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	CTA			CTA	
<b>3139</b>	<b>Contact function, coded</b>	<b>C an..3</b>	<b>M</b>	+IC	<b>IC = Information contact</b>
<b>C056</b>	<b>Department or employee details</b>	<b>C</b>	<b>M</b>		
3413	Department or employee identification	C an..17	N	+	Not used
3412	Department or employee	C an..35	M	: CONTACTNAME	Contact name

**Example:**

CTA+IC+:CONTACTNAME'

**Group:** **SG2** Status: M Max. occ.: 1

**Group:** **SG4** Status: O Max. occ.: 1

**Segment:** **COM** Pos.: 15 Level: 3  
Status: O Max. occ.: 1

**Function:** **Consignor communication details**

**Usage Notes:** Faurecia recommends that a phone number is provided in the ASN, same information as the one printed on the paper delivery note.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
COM				COM	
<b>C076</b>	<b>COMMUNICATION CONTACT</b>	<b>M</b>	<b>O</b>		
3148	Communication number	M an..256	M	+0033476334949	Phone number for previous CTA segment
3155	Communication channel Qualifier	M an..3	M	:TE'	TE = Identifier for phone information

**Example:**

COM+0033476334949:TE'

Group: **SG2** Status: M Max. occ.: 1

Segment: **NAD** Pos.: 16 Level: 1  
Status: M Max. occ.: 1

Function: **Seller Name and Address**

Usage Notes: **SG2-NAD with Seller details must be present.** It is critical information; messages not containing this information will be rejected.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
NAD				NAD	
<b>3035</b>	<b>Party qualifier</b>	<b>M an..3</b>	<b>M</b>	+SE	<b>SE = Seller</b>
<b>C082</b>	<b>Party identification details</b>	<b>C</b>	<b>M</b>		
3039	Party id. identification	M an..35	M	+100453	Seller account number assigned by Faurecia
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency, coded	C an..3	C	:92'	<b>5 = ISO identification</b> <b>10 = ODETTE identification</b> <b>16 = DUNs number</b> <b>92 = assigned by Buyer</b>
<b>C058</b>	<b>Name and address</b>	<b>C</b>	<b>O</b>		
3124	Name and address line	M an..35	M		Address
3124	Name and address line	C an..35	C		
3124	Name and address line	C an..35	C		
3124	Name and address line	C an..35	C		
<b>C080</b>	<b>Party name</b>	<b>C</b>	<b>O</b>		
3036	Party name	M an..35	M		Seller' name
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3036	Party name	C an..35	C		
3045	Party name format, code	C an..3	C		
<b>C059</b>	<b>Street</b>	<b>C</b>	<b>O</b>		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
3042	Street and number/p.o. box	M an..35	C		
<b>3164</b>	<b>City name</b>	<b>C an..35</b>	<b>O</b>		
3229	Country sub-entity identification	C an..9	C		
3251	Postcode identification	C an..9	C		
<b>3207</b>	<b>Country, coded</b>	<b>C an..3</b>	<b>O</b>		Refer to International Standard ISO 3166

**Example:**

NAD+SE+100453::92'

**Group:** **SG1** Status: M Max. occ.: 1

**Segment:** **RFF** Pos.: 17 Level: 1  
Status: M Max. occ.: 1

**Function:** **Vendor account number at Faurecia – Seller reference**

**Usage Notes:** Faurecia requires that the Vendor Account number assigned by Faurecia is present in the Despatch Advice. It is critical information; messages not containing these informations will be rejected.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		
1153	Reference qualifier	M an..3	M	+ADE	<b>ADE = Account number</b>
1154	Reference number	C an..35	M	:0000123456'	Account number assigned by Faurecia, 10 numeric digits max, leading zeroes.

**Example:**

RFF+ADE:0000123456'

Group: **SG6** Status: C Max. occ.: 1

Segment: **TDT** Pos.: 18 Level: 1  
Status: M Max. occ.: 1

Function: **Details on transport**

**Usage Notes:** In flows to North America operations of Faurecia, Transport details including the SCAC code must be provided in the Despatch Advice.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
TDT				TDT	
<b>8051</b>	<b>Transport stage qualifier</b>	<b>M</b> an..3	<b>M</b>	+12	<b>12=At departure</b>
8028	Conveyance reference number	C an..17	N		Not used
<b>C220</b>	<b>Mode of transport</b>	<b>C</b>	<b>O</b>		
8067	Mode of transport, coded	M an..3	M	+30	30=By road
8066	Mode of Transport	C an..17	N		Not used
<b>C228</b>	<b>Transport means</b>	C an..3	N		Not used
<b>C040</b>	<b>Carrier</b>	<b>C</b>	<b>M</b>		
3127	Carrier identification	M an..17	M	+ABNA	SCAC code when required
1131	Code list qualifier	C an..3	N	:	Not used
3055	Code list responsible agency,	C an..3	N	:	Not used
3128	Carrier name	C an..35	C	:CARRIERNAME'	Carrier Name

**Example:**

TDT+12++30++ABNA:::CARRIERNAME'

Group: **SG8** Status: M Max. occ.: 1

Segment: **EQD** Pos.: 19 Level: 1  
Status: M Max. occ.: 1

Function: **Details on transport**

Usage Notes: Faurecia requires that the license plate number of the equipment, e.g. trailer is present in the Despatch Advice.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
EQD		<b>M</b>	<b>M</b>	EQD	
<b>8053</b>	<b>Equipment qualifier</b>	<b>C an..3</b>	<b>M</b>	+TE	<b>TE = Trailer</b> <b>CN = Container</b> <b>ZZZ = Mutually defined</b>
<b>C237</b>	<b>Equipment Identification</b>	<b>C</b>	<b>M</b>		
8260	Equipment identification number	M an..17	M	+1234ABC89'	License plate number of the equipment, e.g. the trailer
1131	Mode of Transport	C an..17	N		Not used
3055	Code list responsible agency, cod	C an..3	N		Not used
3207	Country, coded	C an..3	N		Not used

**Example:**

EQD+TE+12345ABC89'

**Group:** **SG10** Status: M Max. occ.: 9999

**Segment:** **CPS** Pos.: 20 Level: 1  
Status: M Max. occ.: 1

**Function:** **Consignment Packing Sequence**

**Usage Notes:** Faurecia requires that at least 1 occurrence of SG10 is present in the Despatch Advice. The segment group 10 shall be repeated when several material numbers are delivered to the same place of discharge Faurecia requires that the Inner level of packaging (CPS 7075 = 1) is described, i.e. the level of the Package, the packaging in which the article itself is loaded. **It is critical information.**

**Despatch Advices without description of Inner Packaging might be rejected.** In addition one segment group 10 may be created per description of Outer Packaging (CPS 7075 = 3). Outer Packaging level shall not be present when the packaging described as Inner Packaging is a Simplified Handling Unit. Description of Inner Packaging should come first in the message.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	CPS	<b>M</b>	<b>M</b>	CPS	
<b>7164</b>	<b>Hierarchical id. number</b>	<b>C</b> an..12	<b>M</b> n..6	+1	Line number, numeric 6 digits max. This number may not be repeated within the same despatch advice.
7166	Hierarchical parent id.	C an..12	N		Not used
<b>7075</b>	<b>Packaging level, coded</b>	<b>C</b> an..3	<b>M</b>	+1'	<b>1=Inner 3=Outer</b>

**Example:**

CPS+1++1'

CPS+2++3'



Group: **SG10** Status: M Max. occ.: 9999

Group: **SG11** Status: M Max. occ.: 9999

Segment: **PAC** Pos.: 21 Level: 2  
Status: M Max. occ.: 1

Function: **Packaging description**

**Usage Notes:** Faurecia requires that SG11 with at least 1 occurrence per SG10 is present in the message. The segment group 11 shall be repeated when a material is packed with different package types or if the same material is packed in the same package but with different quantities. **C531-data element 7233 is conditional.** In General  
7233 may be not populated, unless in 2 cases: **C531- data element 7233 shall be used when the current CPS structure describes the Outer Packaging level.** In addition **C531-data element 7233 shall be used when the PAC segment describes an Auxiliary Packaging material.** Faurecia recommends using value 41 when PAC describes a pallet type and value 37 when PAC describes an auxiliary packaging material, example top cover, lid, etc...

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
PAC		M	M	PAC	
<b>7224</b>	<b>Number of packages</b>	<b>C n..8</b>	<b>M</b>	<b>+3</b>	The number of packages described in C202.
<b>C531</b>	<b>Packaging details</b>	<b>C</b>	<b>C</b>		
7075	Packaging level, coded	M an..3	N	+	Not used
7233	Packaging related information, coded	C an..3	C	:37	<b>41 = pallet type 37 =auxiliary packaging type</b>
7073	Packaging terms and conditions, coded	C an..3	N	+	Not used
<b>C202</b>	<b>Package type</b>	<b>C</b>	<b>M</b>		
7065	Type of package, identification	C an..17	M	+FAU-1234-R	Faurecia's reference number for the type of package used.
1131	List qualifier	C an..3	N	:	Not used
3055	List responsible agency, coded	C an..3	C	:92	92=assigned by Buyer
7064	Type of package	C an..35	N		Not used
C402	Package type identification	C n..8	N		Not used
C532	Returnable package details	C n..8	N		Not used

**Examples:**

PAC+3++FAU-1234-R::92' 3 packages of type "FAU-1234-R"

**PAC+2+:41+EUR-PALETA-X::92' 2 pallets of type "EUR-PALETA-X"**

**PAC+1+:37+ KLT-VK1208-F::92' 1 auxiliary packaging material of type "KLT-VK1208-F"**

**Note:** Outer packaking & auxiliary packaging information is optional

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG11** Status: M Max. occ.: 9999

**Segment:** **QTY** Pos.: 22 Level: 3  
Status: C Max. occ.: 1

**Function:** **Quantity of materials in the Package.**

**Usage Notes:** **SG11-QTY** shall be **present when CPS 7075 = 1** (i.e. current CPS structure describes the Inner Packaging)  
**SG11-QTY** shall **NOT be present when CPS 7075 <> 1**.  
requires that the Measure unit qualifier 6411 is populated. Faurecia

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
QTY		M	M	QTY	
<b>C186</b>	<b>Quantity details</b>	<b>M</b>	<b>M</b>		
6063	Quantity qualifier	M an..3	M	+53	<b>52 = quantity per pack</b>
6060	Quantity	M n..15	M	:100	Quantity
6411	Measure unit qualifier	C an..3	M	:PCE'	For code see UN/ECE Recommendation Nr 20.

**Example:**

QTY+52:100:PCE'

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG11** Status: M Max. occ.: 9999

**Group:** **SG13** Status: M Max. occ.: 1000

**Segment:** **PCI** Pos.: 23 Level: 3  
Status: M Max. occ.: 1

**Function:** **Package Identification**

**Usage Notes:** **SG11-SG13 shall be present when CPS 7075 = 1 or CPS 7075 = 3:** Current CPS structure describes the Inner or Outer Packaging.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
PCI		M	M	PCI	
<b>4233</b>	<b>Marking instructions, coded</b>	C an..3	M	+17'	<b>17=Seller's instructions</b>
<b>C210</b>	<b>MARKS &amp; LABELS</b>	<b>C</b>	<b>N</b>		Not used
7102	Shipping marks	M an..3	N		Not used
7102	Shipping marks	M n..15	N		Not used
7102	Shipping marks	C an..3	N		Not used
8275	Container/package status, coded	C an..3	N		Not used
<b>C827</b>	<b>TYPE OF MARKING</b>	<b>C</b>	<b>N</b>		Not used
7511	Type of marking, coded	M an..3	N		Not used
1131	Code list qualifier	C an..3	N		Not used.
3055	Code list responsible agency, coded	C an..3	N		Not used

**Examples:**

PCI+17'

Group: **SG10** Status: M Max. occ.: 9999

Group: **SG11** Status: M Max. occ.: 9999

Group: **SG13** Status: C Max. occ.: 1000

Segment: **RFF** Pos.: 24 Level: 4  
Status: M Max. occ.: 1

Function: **Reference to the handling unit**

**Usage Notes:** **SG13-RFF shall be present when CPS 7075 = 1** (i.e. current CPS structure describes the Inner Packaging)  
**SG13-RFF shall NOT be present when CPS 7075 <> 1.**

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF		M	M	RFF	
<b>C506</b>	<b>REFERENCE</b>	<b>M</b>	<b>M</b>		
1153	Type of marking, coded	M an..3	M	+AAT	<b>AAT=master label number</b>
1154	Reference number	M an..35	M n..9	:123456789'	Reference to the master label number of the handling unit which contains the packages identified in the GIR segments below. <b>9 numeric digits max. The reference number must be unique.</b>
1156	Line number	C an..3	N		Not used
4000	Reference version number	C an..3	N		Not used

**Example:**

RFF+AAT:123456789'

Group: **SG10** Status: M Max. occ.: 9999

Group: **SG11** Status: M Max. occ.: 9999

Group: **SG13** Status: C Max. occ.: 1000

Segment: **GIR** Pos.: 25 Level: 4  
Status: M Max. occ.: 99

Function: **Identifies connected to single package**

**Usage Notes:** **SG13-GIR shall be present when CPS 7075 = 1**, i.e. the current CPS structure describes the Inner Packaging. The GIR segment will be repeated for each package label number.  
**SG13-GIR shall NOT be present when CPS 7075 <> 1.**

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
GIR		M	M	GIR	
<b>7297</b>	<b>Set Identification Qualifier</b>	<b>M</b>	<b>M</b>	+3	<b>3=package</b>
<b>C206</b>	<b>IDENTIFICATION NUMBER</b>	<b>M</b>	<b>M</b>		
7402	Identity number	M an..35	M n..9	+987654321	Package label number for the S-marked unit. <b>numeric digits max. The number must be unique</b> 9
7405	Identity number qualifier	M an..35	M n..9	:ML	ML=marking/label number
4405	Status, coded	C an..3	N		Not used
4000	Reference version number	C an..3	N		Not used
<b>C206</b>	<b>IDENTIFICATION NUMBER</b>	<b>C</b>	<b>N</b>		Not used
7402	Identity number	M an..35	N		Not used
7405	Identity number qualifier	M an..35	N		Not used
4405	Status, coded	C an..3	N		Not used
4000	Reference version number	C an..3	N		Not used
C206	IDENTIFICATION NUMBER	C	N		Not used
C206	IDENTIFICATION NUMBER	C	N		Not used
C206	IDENTIFICATION NUMBER	C	N		Not used

**Example:**

GIR+3+987654321:ML'

**Group:** **SG11** Status: M Max. occ.: 9999

**Group:** **SG13** Status: C Max. occ.: 1000

**Group:** **SG14** Status: C Max. occ.: 1000

**Segment:** **GIN** Pos.: 26 Level: 4  
Status: M Max. occ.: 1

**Function:** Identifies connected to single package

**Usage Notes:** **SG13-SG14 shall be present when CPS 7075 = 3**, i.e. the current CPS structure describes the Outer Packaging.  
**SG13-SG14 shall NOT be present when CPS 7075 = 1.**  
**Important:** The **GIN** segment will be populated **up to 5 Identity Numbers then repeated.**

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	GIN	M	M	GIN	
<b>7405</b>	<b>Identity number qualifier</b>	<b>M an..3</b>	<b>M</b>	+ML	<b>ML = Marking/label number</b>
<b>C208</b>	<b>IDENTITY NUMBER RANGE</b>	<b>M</b>	<b>M</b>		
7402	Identity number	M an..35	M n..9	+987654321	HU label number for the Upper level of Packaging. <b>9 numeric digits max. The number must be unique</b>
7402	Identity number qualifier	C	N		Not Used.
C208	IDENTITY NUMBER RANGE	C	C		
C208	IDENTITY NUMBER RANGE	C	C		
C208	IDENTITY NUMBER RANGE	C	C		
C208	IDENTITY NUMBER RANGE	C	C		

**Examples:**

3 numbers: GIN+ML+1001+1002+1003'

7 numbers: GIN+ML+1001+1002+1003+1004+1005'

GIN+ML+1006+1007'

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG15** Status: C Max. occ.: 1

**Segment:** **LIN** Pos.: 27 Level: 2  
Status: M Max. occ.: 1

**Function:** **Item**

**Usage Notes:** **SG10-SG15 shall be present when CPS 7075 = 1**, i.e. the current CPS structure describes the Inner Packaging  
**SG10-SG15 shall NOT be present when CPS 7075 <> 1.**  
 Faurecia accepts only single-article packages, therefore 1222 must be set to zero.  
 There is only 1 occurrence of segment group 15 per SG10. There is only 1 occurrence of LIN per article line.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
LIN		M	M	LIN	
1082	Line item number	C n..6	N	+	Not used
1229	Action request/notification	C an..3	N	+	Not used
<b>C212</b>	<b>ITEM NUMBER IDENTIFICATION</b>	<b>C</b>	<b>M</b>		
7140	Item number	M an..35	M an..35	+96186112ZL	Material number assigned by Faurecia.
7143	Item number type, coded	C an..3	M	:IN	IN=Buyer's item number
1131	List qualifier	C an..3	N		Not used
3055	List responsible agency,	C an..3	N		Not used
C829	SUB-LINE INFORMATION	C	N	+	Not used
<b>1222</b>	<b>Configuration level</b>	<b>C n..2</b>	<b>O</b>	+0'	<b>0 = no level</b>
7083	Configuration, coded	C an..3	N		Not used

**Example:**

LIN+++96186112ZL:IN++0'

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG15** Status: C Max. occ.: 1

**Segment:** **PIA** Pos.: 28 Level: 3  
Status: O Max. occ.: 1

**Function:** **Item**

**Usage Notes:** Faurecia does not require in general additional product identifications. When present they are for information only.

EDIFACT			FAURECIA Implementation		
Name	St	Format	St	Sample	Usage / Remarks
PIA		M	M	PIA	
<b>4347</b>	<b>Product id. Function qualifier</b>	<b>M an..3</b>	<b>M</b>	+1	<b>1=Additional identification</b>
<b>C212</b>	<b>ITEM NUMBER</b>	<b>M</b>	<b>M</b>		
7140	Item number	C an..35	M	+18G6508000	<b>SA=Supplier's article number</b> <b>MP=Product identification number assigned by Faurecia</b>
7143	Item number type, coded	C an..3	M	:SA'	
1131	List qualifier	C an..3	N		
3055	List responsible agency,	C an..3	N		Not used
<b>C212</b>	<b>ITEM NUMBER</b>	<b>M</b>	<b>O</b>		
7140	Item number	C an..35	O	+ BATCHN	<b>BB=Vendor Batch number</b>
7143	Item number type, coded	C an..3	O	:BB'	
1131	List qualifier	C an..3	N		
3055	List responsible agency,	C an..3	N		Not used
C212	ITEM NUMBER	C	N		Not used
C212	ITEM NUMBER	C	N		Not used
C212	ITEM NUMBER	C	N		Not used

**Example:**

PIA+1+18G6508000:SA'

PIA+1+18G6508000:SA+BATCHN:BB'



**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG15** Status: C Max. occ.: 1

**Segment:** **IMD** Pos.: 29 Level: 3  
Status: O Max. occ.: 1

**Function:** **Item description**

**Usage Notes** For information only. Faurecia advises that the Material description is present in the Despatch Advice.

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
IMD				IMD	
7077	Item description type, coded	C an..3	N +		Not used
7081	Item characteristic, coded	C an..3	N +		Not used
<b>C273</b>	<b>Item description</b>	<b>C</b>	<b>M</b>		
7009	Item description identification	C an..17	N +		Not used
1131	Code list qualifier	C an..3	N :		Not used
3055	Code list responsible agency, coded	C an..3	N :		Not used
7008	Item description	C an..35	M :MATDESCRIPTION		Description of the material delivered
7008	Item description	C an..35	O :DESCRIPTION2'		Optional additional description
3453	Language,coded	C an..3	N		Not used
7383	Surface/layer indicator, coded	C an..3	N		Not used

**Example:**

IMD+++:::MATDESCRIPTION:DESCRIPTION2'

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG15** Status: C Max. occ.: 1

**Segment:** **QTY** Pos.: 30 Level: 3  
Status: M Max. occ.: 1

**Function:** **Quantity shipped**

**Usage Notes** Faurecia requires that the Measure unit qualifier 6411 is populated

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
QTY				QTY	
<b>C186</b>	<b>Quantity details</b>	<b>C</b>	<b>M</b>		
6063	Quantity qualifier	M an..3	M	+12	<b>12 = Despatch Quantity</b>
6060	Quantity	M n..15	M n..10	:100'	Quantity
6411	Measure unit qualifier	C an..3	M	:PCE'	For code see UN/ECE Recommendation Nr 20.

**Example:**

QTY+12:100:PCE'

QTY+12:500:KGM'

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG15** Status: C Max. occ.: 1

**Segment:** **ALI** Pos.: 31 Level: 3  
Status: M Max. occ.: 1

**Function:** **Country of origin**

**Usage Notes** Faurecia requires that the Country of Origin 3239 is populated

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
ALI				ALI	
3239	Country of origin, coded	C an..3	M	+PL'	Refer to International Standard ISO 3166
9213	Type of duty regime, coded	C an..3	N		Not used
4183	Country of origin, coded	C an..3	N		Not used
4183	Country of origin, coded	C an..3	N		Not used
4183	Country of origin, coded	C an..3	N		Not used
4183	Country of origin, coded	C an..3	N		Not used
4183	Country of origin, coded	C an..3	N		Not used

**Example:**

ALI+PL'

**Group:** **SG10** Status: M Max. occ.: 9999

**Group:** **SG15** Status: C Max. occ.: 1

**Segment:** **FTX** Pos.: 32 Level: 3  
Status: O Max. occ.: 1

**Function:** **Free Text at line item level**

**Usage Notes** For information only

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
FTX				FTX	
<b>4451</b>	<b>Text subject code qualifier</b>	<b>M an..3</b>	<b>M</b>	<b>+LIN'</b>	<b>LIN=line item level</b>
4453	Free text function code	C an..3	N	+	Not used
C107	Text reference	C	N	+	Not used
4441	Free text description code	C an..3	N		Not used
1131	Code list identification code	C an..3	N		Not used
3055	Code list responsible agency code	C an..3	N		Not used
<b>C108</b>	<b>Text reference</b>	<b>C</b>	<b>M</b>		
4440	Free text	C an..512	C	+FREE TEXT'	
4440	Free text	C an..512	C		
4440	Free text	C an..512	C		
4440	Free text	C an..512	C		
4440	Free text	C an..512	C		
3453	Language name code	C	N		Not used
4447	Free text format code	C	N		Not used

**Example:**

FTX+LIN+++FREE TEXT'

**Group:** **SG10** Status: C Max. occ.: 1

**Group:** **SG15** Status: C Max. occ.: 1

**Group:** **SG16** Status: M Max. occ.: 1

**Segment:** **RFF** Pos.: 33 Level: 4  
Status: M Max. occ.: 1

**Function:** **Purchase Order number**

**Usage notes:** SG16-RFF is mandatory. Faurecia requires that the Order Number issued by Faurecia (1 specific number per material) is present in the Despatch Advice. It is critical data element; missing or wrong values will result in message errors. The value taken by the data element C506 1154 must be retrieved from the delivery schedule, message DELFOR D96A transmitted by Faurecia

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
RFF				RFF	
<b>C506</b>	<b>Reference</b>	<b>M</b>	<b>M</b>		
1153	Reference qualifier	M an..3	M	+ON	<b>ON = Order number (purchase)</b> Order number for the material. To retrieve from the DELFOR message. Faurecia. 10 numeric digits max.
1154	Reference number	C an..35	C	:5500270069'	

**Example:**

RFF+ON:5500270069'

**Segment:** **UNT** Pos.: 34 Level: 0  
Status: M Max. occ.: 1

**Function:** MESSAGE TRAILER

**Usage notes:** A service segment is ending a message

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	UNT			UNT	
<b>0074</b>	<b>Number of segments in a message</b>	<b>M n..6</b>	<b>M</b>	+70	
<b>0062</b>	<b>Message reference number</b>	<b>M an..14</b>	<b>M</b>	+1234'	Message control number assigned by the sender of the message.

**Example:**

UNT+70+1234'

**Segment:** **UNZ** Pos.: 35 Level: 0  
Status: M Max. occ.: 1

**Function:** INTERCHANGE TRAILER

**Usage notes:** A service segment is ending an interchange

EDIFACT			FAURECIA Implementation		
	Name	St Format	St	Sample	Usage / Remarks
	UNZ			UNZ	
<b>0036</b>	<b>Interchange control count</b>	<b>M n..6</b>	<b>M</b>	+1	
<b>0020</b>	<b>Interchange control reference</b>	<b>M an..14</b>	<b>M</b>	+0027005'	

**Example:**

UNZ+1+0027005'

## 4. Examples

Following examples are only illustrative. They **SHALL NEVER** be used as a basis for coding or implementing this message.

### 4.1. Example of Dispatch Advice referring to a MURN - LISA process

Additional mandatory segments for LISA process are highlighted.

UNH+1+DESADV:D:96A:UN'	Message start segment
BGM+351+37191844'	Document number
DTM+137:201408010748:203'	Document date/ time
DTM+132:201408010800:203'	Expected delivery date/time
<b>DTM+11:201408010800:203'</b>	<b>Despatch Date/time</b>
MEA+AAX+AAD+KGM:81'	Total gross weight
RFF+CRN:37191844'	Transport number
<b>RFF+MA:0185247112'</b>	<b>MURN – Manifest number</b>
NAD+SE+1093::92++FAURECIA TRABITZ++++DE'	Seller details
RFF+ADE:1093000000'	Vendor account number at Customer
NAD+CN+1059::92++FAURECIA BAKOV++++CZ'	Consignee details
LOC+11+1059-R084'	Place of discharge
NAD+CZ+1093::92'	Consignor details
EQD+TE+AB 123'	Equipment, trailer id is AB 123
CPS+1+1'	Item structure 1
PAC+4++KLT-008711-R::92'	4 Packaging, pack type is KLT-008711-R
QTY+52:10:PCE'	Standard qty per package is 10
PCI+17'	
RFF+AAT:149883082'	First handling unit has number 149883082
GIR+3+149880128:ML'	4 packages 149880128 to 130 and 149883081
GIR+3+149880129:ML'	
GIR+3+149880130:ML'	
GIR+3+149883081:ML'	
LIN+++18L2001000:IN++0'	Customer item number
PIA+1+18L2001000:SA'	Vendor item number
IMD+++::ROHR KPL PQ35'	
QTY+12:40:PCE'	Total dispatched quantity = 40
ALI+DE'	Country of origin is DE
RFF+ON:5500034387'	PO number
<b>CPS+2++3'</b>	<b>Outer Packaging description</b>
<b>PAC+1++PALLET::92'</b>	<b>type PALLET used</b>
<b>PCI+17'</b>	
<b>GIN+ML+149883082'</b>	<b>identification number used for this package type</b>
UNT+34+1'	Message end segment

**Note:** Outer packaging & auxiliary packaging information is optional



**4.2. Example using Simplified Handling Units**

UNH+1+DESADV:D:96A:UN'	Message start segment
BGM+351+01729'	Document number
DTM+137:201403031536:203'	Document date/ time
DTM+132:201403070000:203'	Expected delivery date/time
MEA+AAX+AAD+KGM:6917'	Total gross weight
RFF+CRN:00000'	
NAD+CN+94000738110550::10++FAURECIA EMISSION CONTROL TECH ITAL'	Consignee details
LOC+11+1505-R256'	Place of discharge
NAD+CZ+0002955800::10++Terni S.r.l.'	Consignor details
NAD+SE+094000575610555001::10++Terni S.r.l.'	Seller details
RFF+ADE:00029558'	Vendor account number at Customer
CPS+001+++1'	Item structure 1
PAC+1++QUADR CON TAVOLE::92'	1 packaging, pack type is QUADR CON TAVOLE.
QTY+52:114:PCE'	Standard qty per package is 114
PCI+17'	
RFF+AAT:144020539'	First handling unit is number 144020539
GIR+3+144020539:ML'	Pack = HU simplified 144020539
LIN+++2025696551:IN++0'	Customer item number
PIA+1+441LI-65X1.20X2321:SA'	Vendor item number
QTY+12:114:PCE'	Total dispatched quantity = 114
ALI+IT'	Country of origin
RFF+ON:5500172919'	PO number
CPS+002+++1'	Item structure 2
PAC+4++QUADR CON TAVOLE::92'	4 Packaging, pack type is QUADR CON TAVOLE
QTY+52:137:PCE'	Standard qty per package is 137
PCI+17'	
RFF+AAT:134010361'	First handling unit is number 134010361
GIR+3+134010361:ML'	Pack = HU simplified 134010361
PCI+17'	
RFF+AAT:194020273'	2nd handling unit is number 134020273
GIR+3+194020273:ML'	Pack = HU simplified 134020273
PCI+17'	
RFF+AAT:194020274'	3rd handling unit is number 134020274
GIR+3+194020274:ML'	Pack = HU simplified 134020274
PCI+17'	
RFF+AAT:194020277'	4th handling unit is number 134020277
GIR+3+194020277:ML'	Pack = HU simplified 134020277
LIN+++2029267629:IN++0'	Customer Item number
PIA+1+441LI-60X1.20X1180:SA'	Vendor Item number
QTY+12:548:PCE'	Total dispatched quantity
ALI+IT'	Country of origin is IT
RFF+ON:5500173008'	PO number
UNT+43+1'	Message end segment

**4.3. Example using homogeneous Handling Units**

UNH+1253509+DESADV:D:96A:UN:A01051'  
 BGM+351+1401000519'  
 DTM+137:201403031536:203'  
 DTM+132:201403070000:203'  
 MEA+AAX+AAD+KGM:209.7'  
 NAD+CN+1494+BIBERBACHSTRASSE 9::86157 AUGSBURG+FAURECIA AUGSBURG+++++DE'  
 LOC+11+1494-R400'  
 NAD+CZ+197232::10+POLIGONO INDUSTRIAL::31350 PERALTA+PLASTICOS FULL S.L.+++++ES'  
 CTA+IC+:SANDRA'  
 COM+(?+34) 948753001:TE'  
 NAD+SE+147232::10+POLIGONO INDUSTRIAL::31350 PERALTA+PLASTICOS FULL S.L.+++++ES'  
 RFF+ADE:197232'  
 CPS+1++1'  
 PAC+48++CARTON 475\*300\*34::92'  
 QTY+52:100:PCE'  
 PCI+17'  
 RFF+AAT:194'  
 GIR+3+1758:ML'  
 GIR+3+1759:ML'  
 GIR+3+1760:ML'  
 GIR+3+1761:ML'  
 GIR+3+1762:ML'  
 GIR+3+1763:ML'  
 GIR+3+1764:ML'  
 GIR+3+1765:ML'  
 GIR+3+1766:ML'  
 GIR+3+1767:ML'  
 PCI+17'  
 RFF+AAT:195'  
 GIR+3+1768:ML'  
 GIR+3+1769:ML'  
 GIR+3+1770:ML'  
 GIR+3+1771:ML'  
 GIR+3+1772:ML'  
 GIR+3+1773:ML'  
 GIR+3+1774:ML'  
 GIR+3+1775:ML'  
 GIR+3+1776:ML'  
 GIR+3+1777:ML'  
 PCI+17'  
 RFF+AAT:196'  
 GIR+3+1778:ML'  
 GIR+3+1779:ML'  
 GIR+3+1780:ML'  
 GIR+3+1781:ML'  
 GIR+3+1782:ML'  
 GIR+3+1783:ML'  
 GIR+3+1784:ML'  
 GIR+3+1785:ML'  
 GIR+3+1786:ML'  
 GIR+3+1787:ML'  
 PCI+17'  
 RFF+AAT:197'  
 GIR+3+1788:ML'  
 GIR+3+1789:ML'  
 GIR+3+1790:ML'  
 GIR+3+1791:ML'  
 GIR+3+1792:ML'  
 GIR+3+1793:ML'  
 GIR+3+1794:ML'  
 GIR+3+1795:ML'  
 GIR+3+1796:ML'  
 GIR+3+1797:ML'  
 PCI+17'  
 RFF+AAT:198'

Message start segment  
 Document number  
 Document date/ time  
 Expected delivery date/time  
 Total gross weight  
 Consignee details  
 Place of discharge  
 Consignor details  
 Contact person name  
 ...And telephone  
 Seller Details  
 Vendor account number at Customer  
 Item structure 1  
 48 Packages, pack type is CARTON...  
 Standard qty per package is 100

First handling unit is number 194  
 10 packages from 1758 to 1767

2nd handling unit is number 195  
 10 packages from 1768 to 1777

3rd handling unit is number 196  
 10 packages from 1778 to 1787

4th handling unit is number 197  
 10 packages from 1788 to 1797

5th handling unit is number 198  
 8 packages from 1798 to 1905

Faurecia specific: M=Mandatory, C=Conditional, O=Optional, N=Not used

GIR+3+1798:ML'  
GIR+3+1799:ML'  
GIR+3+1800:ML'  
GIR+3+1801:ML'  
GIR+3+1802:ML'  
GIR+3+1803:ML'  
GIR+3+1804:ML'  
GIR+3+1805:ML'  
LIN+++2222104011:IN++0'  
PIA+1+2222104011:SA'  
IMD+++:::KUNSTSTOFFHALTER 1512512'  
QTY+12:4800:PCE'  
ALI+ES'  
RFF+ON:5500224113'  
**CPS+2++3'**  
**PAC+5++PALLET::92'**  
**PCI+17'**  
**GIN+ML+194+195+196+197+198'**  
  
UNT+82+1253509'

Customer item number  
Vendor item number  
Item Description  
Total despatched quantity  
Country of origin  
PO number  
**Outer Packaging description**  
**5 times type PALLET used**  
  
**5 identification numbers used for this**  
**package type**  
Message end segment

**Note:** **Outer packaging & auxiliary packaging information is optional**

#### 4.4. Example using Mixed (Heterogeneous) Handling Units

UNH+1+DESADV:D:96A:UN'	Message start segment
BGM+351+01729'	Document number
DTM+137:201403031536:203'	Document date/ time
DTM+132:201403070000:203'	Expected delivery date/time
MEA+AAX+AAD+KGM:6917'	Total gross weight
RFF+CRN:00000'	
NAD+CN+94000738110550::10++FAURECIA EMISSION CONTROL TECH ITAL'	Consignee details
LOC+11+1505-R256'	Place of discharge
NAD+CZ+0002955800::10++Terni S.r.l.'	Consignor details
NAD+SE+094000575610555001::10++Terni S.r.l.'	Seller details
RFF+ADE:00029558'	Vendor account number at Customer
CPS+001++1'	Item structure 1
PAC+1++QUADR CON TAVOLE::92'	1 Packaging, pack type is QUADR CON TAVOLE.
QTY+52:114:PCE'	Standard qty per package is 114
PCI+17'	
<b>RFF+AAT:144020539'</b>	<b>Handling unit has number 144020539</b>
GIR+3+144020101:ML'	1 Package = 144020101
LIN+++2025696551:IN++0'	Customer item number
PIA+1+441LI-65X1.20X2321:SA'	Vendor item number
QTY+12:114:PCE'	Total dispatched quantity = 114
ALI+IT'	Country of origin
RFF+ON:5500172919'	PO number
CPS+002++1'	Item structure 2
PAC+3++QUADR CON TAVOLE::92'	3 packaging, pack type is QUADR CON TAVOLE
QTY+52:137:PCE'	Standard qty per package is 137
PCI+17'	
<b>RFF+AAT:144020539'</b>	<b>Handling unit has number 144020539</b>
GIR+3+134010361:ML'	3 Packages 134010361 to 363
GIR+3+134010362:ML'	
GIR+3+134010363:ML'	
LIN+++2029267629:IN++0'	Customer Item number
PIA+1+441LI-60X1.20X1180:SA'	Vendor Item number
QTY+12:411:PCE'	Total dispatched quantity is 411
ALI+IT'	Country of origin is IT
RFF+ON:5500173008'	PO number
<b>CPS+003++3'</b>	<b>Outer Packaging description</b>
<b>PAC+1++PALLET::92'</b>	<b>type PALLET used</b>
<b>PCI+17'</b>	
<b>GIN+ML+144020539'</b>	<b>identification number used for this package type</b>
UNT+40+1'	Message end segment

**Note:** **Outer packaging & auxiliary packaging information is optional**

**Additional: If Outer package is informed, it MUST be the right one. This one is not informed in DELJIT**

## 5. Appendix

Below are some notes/instructions to help the Supplier create the proper ASN to pass certification.

### 1) Handling Unit (aka **label serial numbers** on Supplier labels) for RFF+ATT, GIR, GIN.

Do **not** put **leading zeros** on any of these segments.

Do **not** put any **alpha characters or prefix's** in the data as well.

**It should be all NUMERIC data.**

**It should always be unique.**

If you have a serial number "000000011" the ASN value should contain "11" only for that segment.


If you master label serial number is "M000001234" you need to send only "1234".

If you HU contains "S00012345" you need to send "12345"

**2) Looping of Inner and Outer Packages.**

Each ASN should follow the business logic below when it comes to CPS+1 (inner) and CPS+3 (outer)

If two parts are packed with the same pallet name, the ASN should have all the related information regarding the two parts at the CPS+[counter]++1 level before adding the summarized CPS+[counter]++3 level as illustrated below:

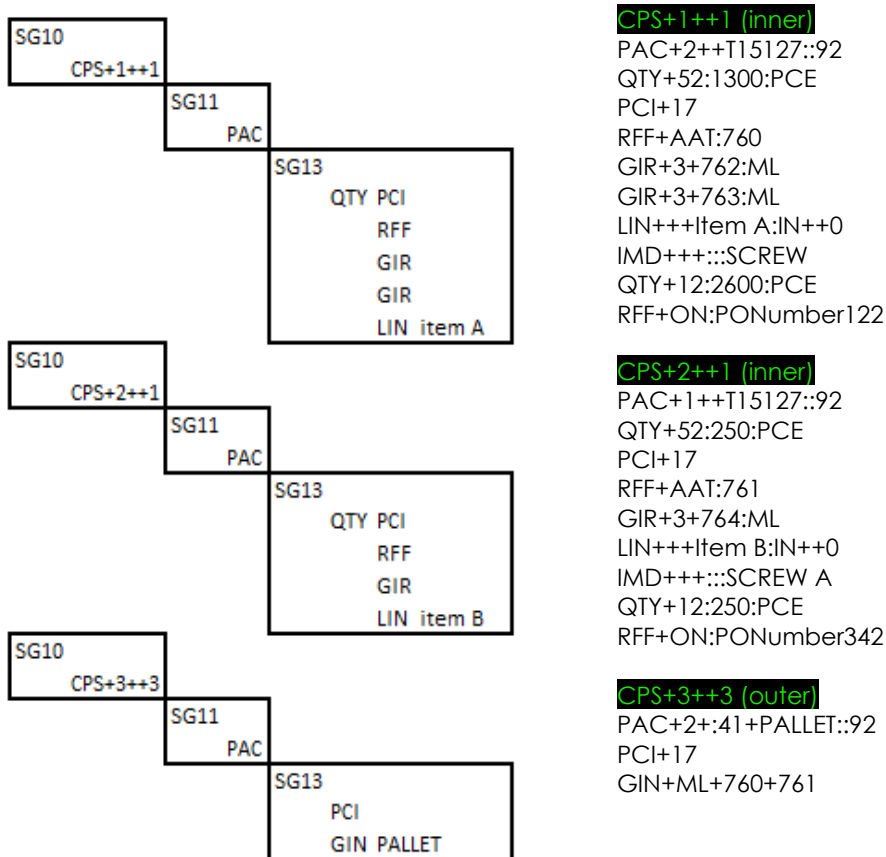


If the ASN has the loops like below, it will fail:

You cannot send the Outer Pallet (CPS+[counter]++3) after **each** Inner Level (CPS+[counter]++1) as show below.

So if you have item A packed in a PALLET-A, then item B packed in PALLET-B, the ASN will fail.

As a general rule, all CPS+x++3 should be at the **end of the ASN in a summarized format by PAC pallet name.**

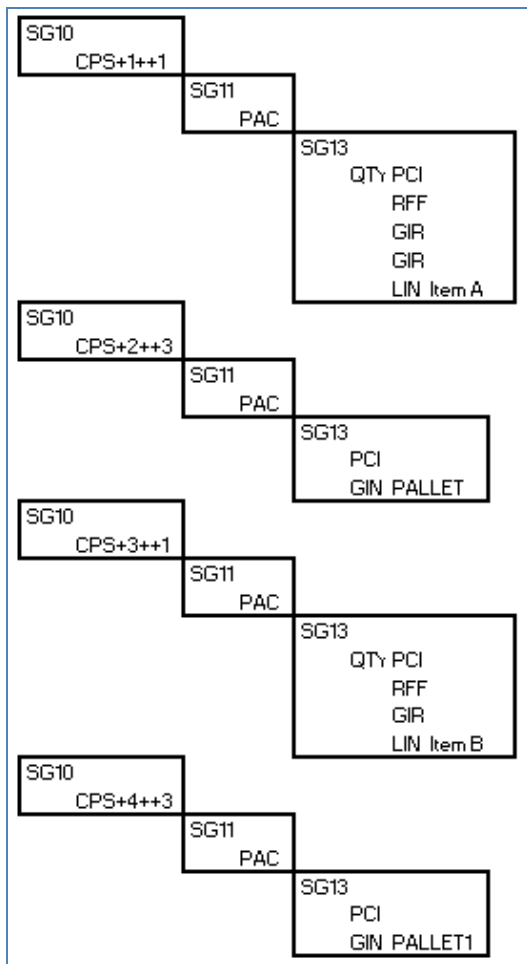

**CPS+1++1 (inner)**  
PAC+2++T15127::92  
QTY+52:1300:PCE  
PCI+17  
RFF+AAT:760  
GIR+3+762:ML  
GIR+3+763:ML  
LIN+++Item A:IN++0  
IMD+++::SCREW  
QTY+12:2600:PCE  
RFF+ON:PONumber356

**CPS+2++3 (outer)**  
PAC+1+:41+PALLET::92  
PCI+17  
GIN+ML+760

**CPS+3++1 (inner)**  
PAC+1++T15127::92  
QTY+52:250:PCE  
PCI+17  
RFF+AAT:761  
GIR+3+764:ML  
LIN+++Item B:IN++0  
IMD+++::SCREW A  
QTY+12:250:PCE  
RFF+ON:PONumber3157

**CPS+4++3 (outer)**  
PAC+1+:41+PALLET1::92  
PCI+17  
GIN+ML+761

If shipping in **Mixed** skids as below take note of the structure.

If **using Aux.Packaging**, they should be at the end of the message using CPS+x++3.

Example: Shipping 3 part numbers across different pallets

Loop	Material	Serial	qty/tote	Ctn-Type	Loop	Material	Serial	qty/tote	Ctn-Type	Loop	Material	Serial	qty/tote	Ctn-Type
CPS+1	Part-A	10001	20	CTN1	CPS+2	Part-B	10004	10	CTN1	CPS+2	Part-B	10015	30	CTN1
CPS+1	Part-A	10002	20	CTN1	CPS+2	Part-B	10005	10	CTN1					
CPS+2	Part-B	10003	30	CTN1	CPS+2	Part-B	10006	10	CTN1					
CPS+3	Part-C	10013	30	CTN1	CPS+2	Part-B	10007	10	CTN1					
CPS+3	Part-C	10014	30	CTN1	CPS+2	Part-B	10008	10	CTN1					
<b>100 (CPS+4++3)</b>					CPS+1	Part-A	10009	20	BOX1					
					CPS+1	Part-A	10010	20	BOX1					
					CPS+1	Part-A	10011	20	BOX1					
					CPS+1	Part-A	10012	20	BOX1					
<b>200 (CPS+4++3)</b>					<b>300 (CPS+5++3)</b>									

UNH+1+DESADV:D:96A:UN'  
 BGM+351+37191844'  
 DTM+137:201408010748:203'  
 DTM+132:201408010800:203'  
 DTM+11:201408010800:203'  
 MEA+AAX+AAD+KGM:81'  
 RFF+CRN:37191844'  
 RFF+MA:0185247112'  
 NAD+SE+1093::92++FAURECIA TRABITZ+++++DE'  
 RFF+ADE:1093000000'  
 NAD+CN+1059::92++FAURECIA BAKOV+++++CZ'  
 LOC+11+1059-R084'  
 NAD+CZ+1093::92'  
 EQD+TE+AB 123'

LISA-NG manifest number

CPS+1++1  
 PAC+2++CTN1::92  
 QTY+52:20:PCE  
 PCI+17  
 RFF+AAT:100  
 GIR+3+100001:ML  
 GIR+3+100002:ML  
 PAC+4++BOX1::92  
 QTY+52:20:PCE  
 PCI+17  
 RFF+AAT:200  
 GIR+3+100009:ML  
 GIR+3+100010:ML  
 GIR+3+100011:ML  
 GIR+3+100012:ML  
 LIN+++PART-A  
 PIA+1+6:BB  
 QTY+1:120:PCE  
 ALI+US  
 RFF+ON:5800018461

2 totes of Part A is put on pallet 100  
 1 tote of Part B is put on pallet 100  
 2 totes of Part C is put on pallet 100



CPS+2++1  
PAC+1++CTN1::92  
QTY+52:30:PCE  
PCI+17  
RFF+AAT:100  
GIR+3+100003:ML  
PAC+1++CTN1::92  
QTY+52:30:PCE  
PCI+17  
RFF+AAT:300  
GIR+3+100015:ML  
PAC+5++CTN1::92  
QTY+52:10:PCE  
PCI+17  
RFF+AAT:200  
GIR+3+100004:ML  
GIR+3+100005:ML  
GIR+3+100006:ML  
GIR+3+100007:ML  
GIR+3+100008:ML  
LIN+++PART-B  
PIA+1+6:BB  
QTY+1:110:PCE  
ALI+US  
RFF+ON:5800026312

5 totes of Part B is put on pallet 200  
4 totes of Part A is put on pallet 200

CPS+3++1  
PAC+2++CTN1::92  
QTY+52:30:PCE  
PCI+17  
RFF+AAT:100  
AGIR+3+100013:ML  
GIR+3+100014:ML  
LIN+++PART-C  
PIA+1+6:BB  
QTY+1:60:PCE  
ALI+US  
RFF+ON:5800035591

1 tote of Part B is put on pallet 300

**CPS+4++3**  
**PAC+2+:41+BASE4845::92**  
**PCI+17**  
**GIN+ML+100+200**

If sending Aux Pallet codes, each pallet name should have the corresponding Master Serial #. This loop corresponds to pallets "100" and "200"

**CPS+5++3**  
**PAC+1+:41+BASE9999::92**  
**PCI+17**  
**GIN+ML+300**

This loop takes into account the 3rd Pallet "300" with Part-B, child serial number 10015

UNT+79+0001  
UNZ+1+1136

**3) When LISA DESADV,**

it is **MANDATORY** to follow **LISA rule of 1 DESADV by Manifest (DELJIT) using 1 Supplier Delivery note** as stated in Supplier Logistic Manual available at <https://www.faurecia.com/en/suppliers/toolkit>

**1 DELJIT (Manifest-RFF+MA) – 1 DESADV with 1 Unique Supplier Delivery Note (BGM+1004)**

It means,

**A Manifest received via the DELJIT message cannot be split into multiple DESADV messages, each referring to different Supplier Delivery notes.**

**Besides RFF+MA segment with Manifest number MUST be always informed**

**Note:** All items within a DELJIT should be informed into same unique DESADV message.

In case any item cannot be delivered as requested in DELJIT, it should be followed the procedure & contact Faurecia counterpart to decide what to do: issue new Manifest for the item/s not possible to deliver,...

See below some samples:

- 1) DESADV D96A **OK** for a given DELJIT-Manifest **0259819285** with 2 items
- 2) DESADV D96A **NOK** for a given DELJIT-Manifest **0259770711** with 2 items

**Sample 1** DESADV D96A **OK** for a given DELJIT-Manifest **0259819285** with 2 items

**DELJIT D96A – Manifest 0259819285**

UNB+UNOA:3+0093100000875450157XXX+00013000124XXXXXXXXXX+240220:1150+0013414'  
 UNH+1+**DELJIT:D:96A**:UN'  
 BGM+242:::DELIVERY JUST IN TIME+**0259819285**'  
 DTM+137:202402201148:203'  
 RFF+ADE:SUPPLIER\_CODE'  
 NAD+BY+BUYER\_CODE::92+Street+Faurecia Company  
 name++City++PostalCode+Country'  
 NAD+SE+SELLER\_CODE::92+Street+Supplier Name++City++PostalCode+Country'  
 NAD+CN+Faurecia\_Plant\_EDI\_Code::92+Street+Faurecia Plant  
 Name++City++PostalCode+Country'  
 SEQ+1+000001'  
 LOC+11+1XXX-RXXX'  
**LIN+1++ITEM1:IN'**  
 PIA+1+199:MP'  
 IMD+XXX+:::ITEM1 DESCRIPTION'  
 PAC+++GALIC11EA1::92'  
 RFF+ON:5500XXXXX2'  
 QTY+21:3168:PCE'  
 DTM+136:202403010900:203'  
 DTM+117:202403071130:203'  
**RFF+MA:0259819285'**  
 RFF+AAO:2024030701-00'  
 QTY+52:264:PCE'  
**LIN+2++ITEM2:IN'**  
 PIA+1+200:MP'  
 IMD+XXX+:::ITEM2 DESCRIPTION'  
 PAC+++GALIC11EA1::92'  
 RFF+ON:5500XXXXX3'  
 QTY+21:2112:PCE'  
 DTM+136:202403010900:203'  
 DTM+117:202403071130:203'  
**RFF+MA:0259819285'**  
 RFF+AAO:2024030701-00'  
 QTY+52:264:PCE'  
 UNT+32+1'  
 UNZ+1+0013414'

**DESADV D96A OK**

UNB+UNOA:1+00013000124XXXXXXXXXX+0093100000875450157XXX+240301:1410+33'  
 UNH+1+**DESADV:D:96A**:UN:A01051'  
 BGM+351+**55209733**'  
 DTM+137:202403011410:203'  
 DTM+11:202403011410:203'  
 DTM+132:202403011410:203'  
 MEA+AX+AAD+KGM:173'  
 RFF+MA:**0259819285**'  
 NAD+CN+Faurecia\_Plant\_EDI\_code++Faurecia plant name'  
 LOC+11+1XXX-RXXX'  
 NAD+CZ+ConsignorCode++Consignor Name'  
 NAD+SE+SellerCode::5++Seller Name'  
 RFF+ADE:SupplierCode'  
 EQD+TE+DOMT3006'  
 CPS+1++1'  
 PAC+12++GALIC11EA1::92'  
 QTY+52:264:PCE'  
 PCI+17'  
 RFF+AAT:102540813'  
 GIR+3+101565821:ML'  
 GIR+3+101565822:ML'  
 GIR+3+101565823:ML'  
 GIR+3+101565824:ML'  
 GIR+3+101565825:ML'  
 GIR+3+101565826:ML'  
 GIR+3+101565827:ML'  
 GIR+3+101565828:ML'  
 GIR+3+101565829:ML'  
 GIR+3+101565830:ML'  
 GIR+3+101565831:ML'  
 GIR+3+101565832:ML'  
**LIN+++ITEM1:IN'**  
 QTY+12:3168:PCE'  
 ALI+CN'  
 RFF+ON:5500XXXXX2'  
 CPS+2++1'  
 PAC+8++GALIC11EA1::92'  
 QTY+52:264:PCE'  
 PCI+17'  
 RFF+AAT:102540896'  
 GIR+3+99902918:ML'  
 GIR+3+99902930:ML'  
 GIR+3+99818757:ML'  
 GIR+3+99818760:ML'  
 PCI+17'  
 RFF+AAT:102540813'  
 GIR+3+99902922:ML'  
 GIR+3+99818754:ML'  
 GIR+3+99818761:ML'  
 GIR+3+99818768:ML'  
**LIN+++ITEM2:IN'**  
 QTY+12:2112:PCE'  
 ALI+CN'  
 RFF+ON:5500XXXXX3'  
 CPS+3++3'  
 PAC+2++LWP1208EA1::92'  
 PCI+17'  
 GIN+ML+102540896'  
 GIN+ML+102540813'  
 UNT+59+1'  
 UNZ+1+33'

**Sample 2** DESADV D96A **NOK** for a given DELJIT-Manifest **0259770711** with 2 items

**DELJIT D96A – Manifest 0259770711**

UNB+UNOA:3+0093100000875450157XXX+00013000124XXXXXXXXXX+240206:1203+0013296'  
 UNH+1+DELJIT:D:96A:UN'  
 BGM+242:::DELIVERY JUST IN TIME+0259770711'  
 DTM+137:202402061159:203'  
 RFF+ADE:SUPPLIER\_CODE'  
 NAD+BY+BUYER\_CODE::92+Street+Faurecia Company  
 name++City++PostalCode+Country'  
 NAD+SE+SELLER\_CODE::92+Street+Supplier Name++City++PostalCode+Country'  
 NAD+CN+Faurecia\_Plant\_EDI\_Code::92+Street+Faurecia Plant  
 Name++City++PostalCode+Country'  
 SEQ+1+000001'  
 LOC+11+1XXX-RXXX'  
**LIN+1++ITEM1:IN'**  
 PIA+1+199:MP'  
 IMD+XXX+:::ITEM 1 DESCRIPTION'  
 PAC+++GALIC11EA1::92'  
 RFF+ON:5500XXXXX2'  
 QTY+21:1320:PCE'  
 DTM+136:202402160900:203'  
 DTM+117:202402221130:203'  
**RFF+MA:0259770711'**  
 RFF+AAO:2024022201-00'  
 QTY+52:264:PCE'  
**LIN+2++ITEM2:IN'**  
 PIA+1+200:MP'  
 IMD+XXX+:::ITEM2 DESCRIPTION'  
 PAC+++GALIC11EA1::92'  
 RFF+ON:5500XXXXX3'  
 QTY+21:1056:PCE'  
 DTM+136:202402160900:203'  
 DTM+117:202402221130:203'  
**RFF+MA:0259770711'**  
 RFF+AAO:2024022201-00'  
 QTY+52:264:PCE'  
 UNT+32+1'  
 UNZ+1+0013296

**DESADV D96A NOK**

UNB+UNOA:1+00013000124XXXXXXXXXX+0093100000875450157XXX+240216:1008+31'  
**UNH+1+DESADV:D:96A:UN:A01051'**  
 BGM+351+55196855'  
 DTM+137:202402161008:203'  
 DTM+11:202402161008:203'  
 DTM+132:202402161008:203'  
 MEA+AAX+AAD+KGM:43'  
 RFF+MA:0259770711'  
 NAD+CN+Faurecia\_Plant\_EDI\_code++Faurecia plant name'  
 LOC+11+1XXX-RXXX'  
 NAD+CZ+ConsignorCode++Consignor Name'  
 NAD+SE+SellerCode::5++Seller Name'  
 RFF+ADE:SupplierCode'  
 EQD+TE+DOMD5810'  
 CPS+1++1'  
 PAC+5++GALIC11EA1::92'  
 QTY+52:264:PCE'  
 PCI+17'  
 RFF+AAT:102395299'  
 GIR+3+101478330:ML'  
 GIR+3+101478333:ML'  
 GIR+3+101478334:ML'  
 GIR+3+101478336:ML'  
 GIR+3+101478346:ML'  
**LIN+++ITEM1:IN'**  
 QTY+12:1320:PCE'  
 ALI+CN'  
 RFF+ON:5500XXXXX2'  
 CPS+2++3'  
 PAC+1++LWP1208EA1::92'  
 PCI+17'  
 GIN+ML+102395299'  
 UNT+32+1'  
**UNH+2+DESADV:D:96A:UN:A01051'**  
 BGM+351+55196856'  
 DTM+137:202402161008:203'  
 DTM+11:202402161008:203'  
 DTM+132:202402161008:203'  
 MEA+AAX+AAD+KGM:90'  
 RFF+MA:0259770711'  
 NAD+CN+Faurecia\_Plant\_EDI\_code++Faurecia plant name'  
 LOC+11+1XXX-RXXX'  
 NAD+CZ+ConsignorCode++Consignor Name'  
 NAD+SE+SellerCode::5++Seller Name'  
 RFF+ADE:SupplierCode'  
 EQD+TE+DOMD5810'  
 CPS+1++1'  
 PAC+4++GALIC11EA1::92'  
 QTY+52:264:PCE'  
 PCI+17'  
 RFF+AAT:102395299'  
 GIR+3+99818759:ML'  
 GIR+3+99818762:ML'  
 GIR+3+99818767:ML'  
 GIR+3+99818770:ML'  
**LIN+++ITEM2:IN'**  
 QTY+12:1056:PCE'  
 ALI+CN'  
 RFF+ON:5500XXXXX3'  
 UNT+27+2'  
 UNZ+2+31'